SERVICE MANUAL

RVD8090RDS

AUDIO/VIDEO RECEIVER

CONTENTS

WIRING DIAGAM
BLOCK DIAGRAM
ELECTRICAL PARTS LIST
SCHAMATIC DIAGRAMS

WIRING DIAGRAM

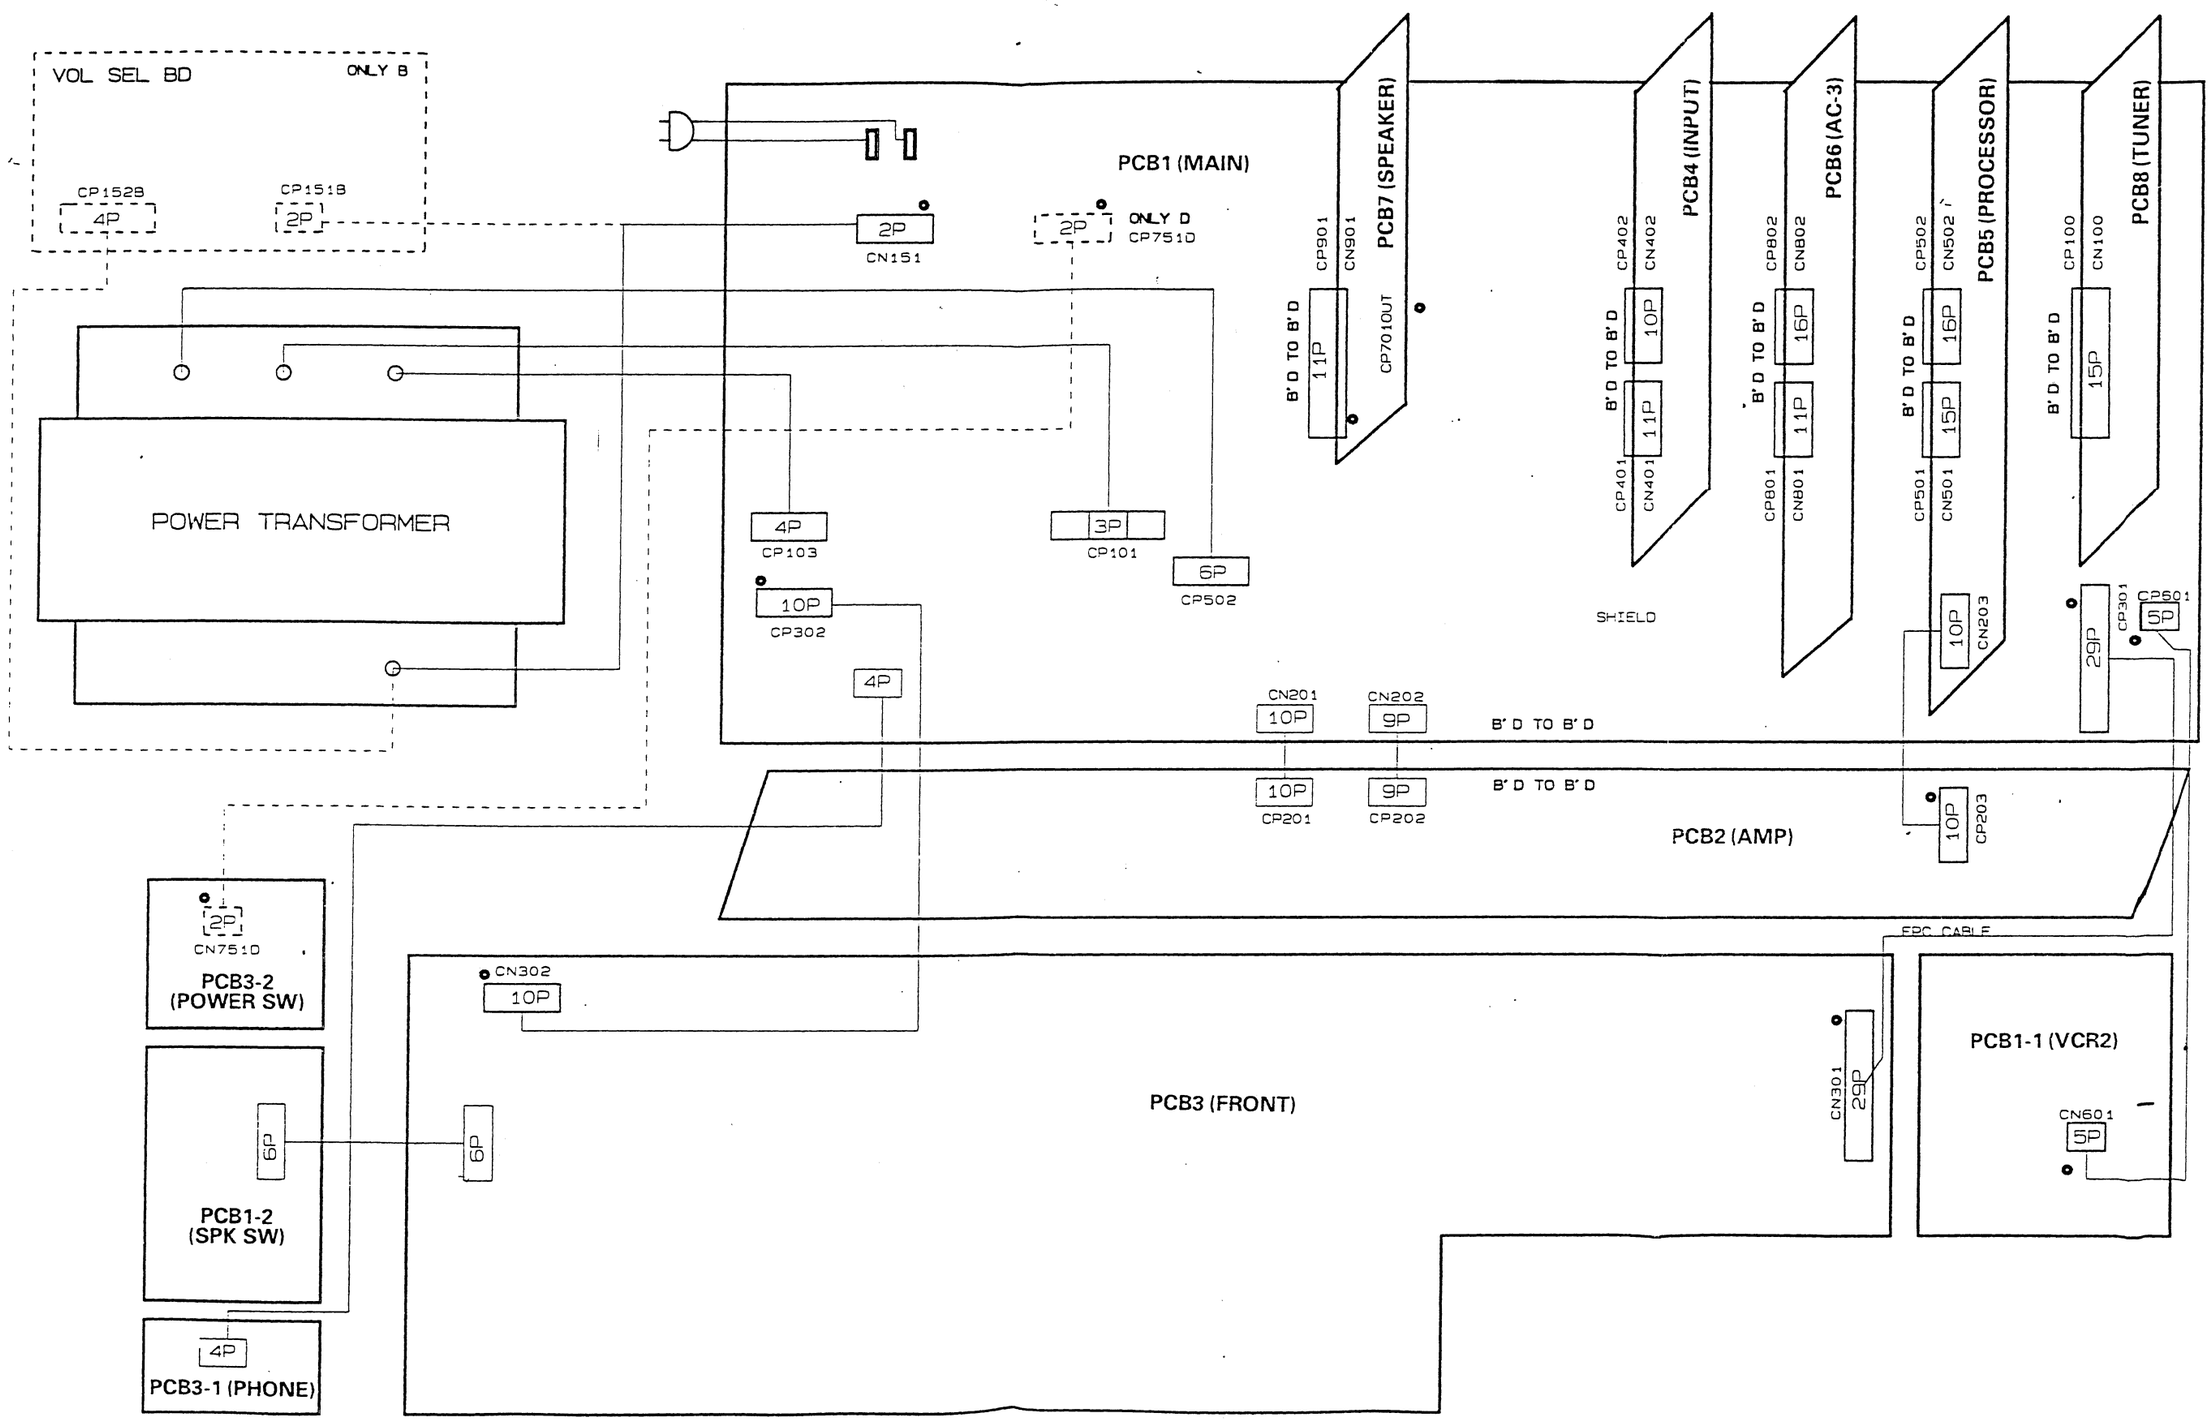

BLOCK DIAGRAM

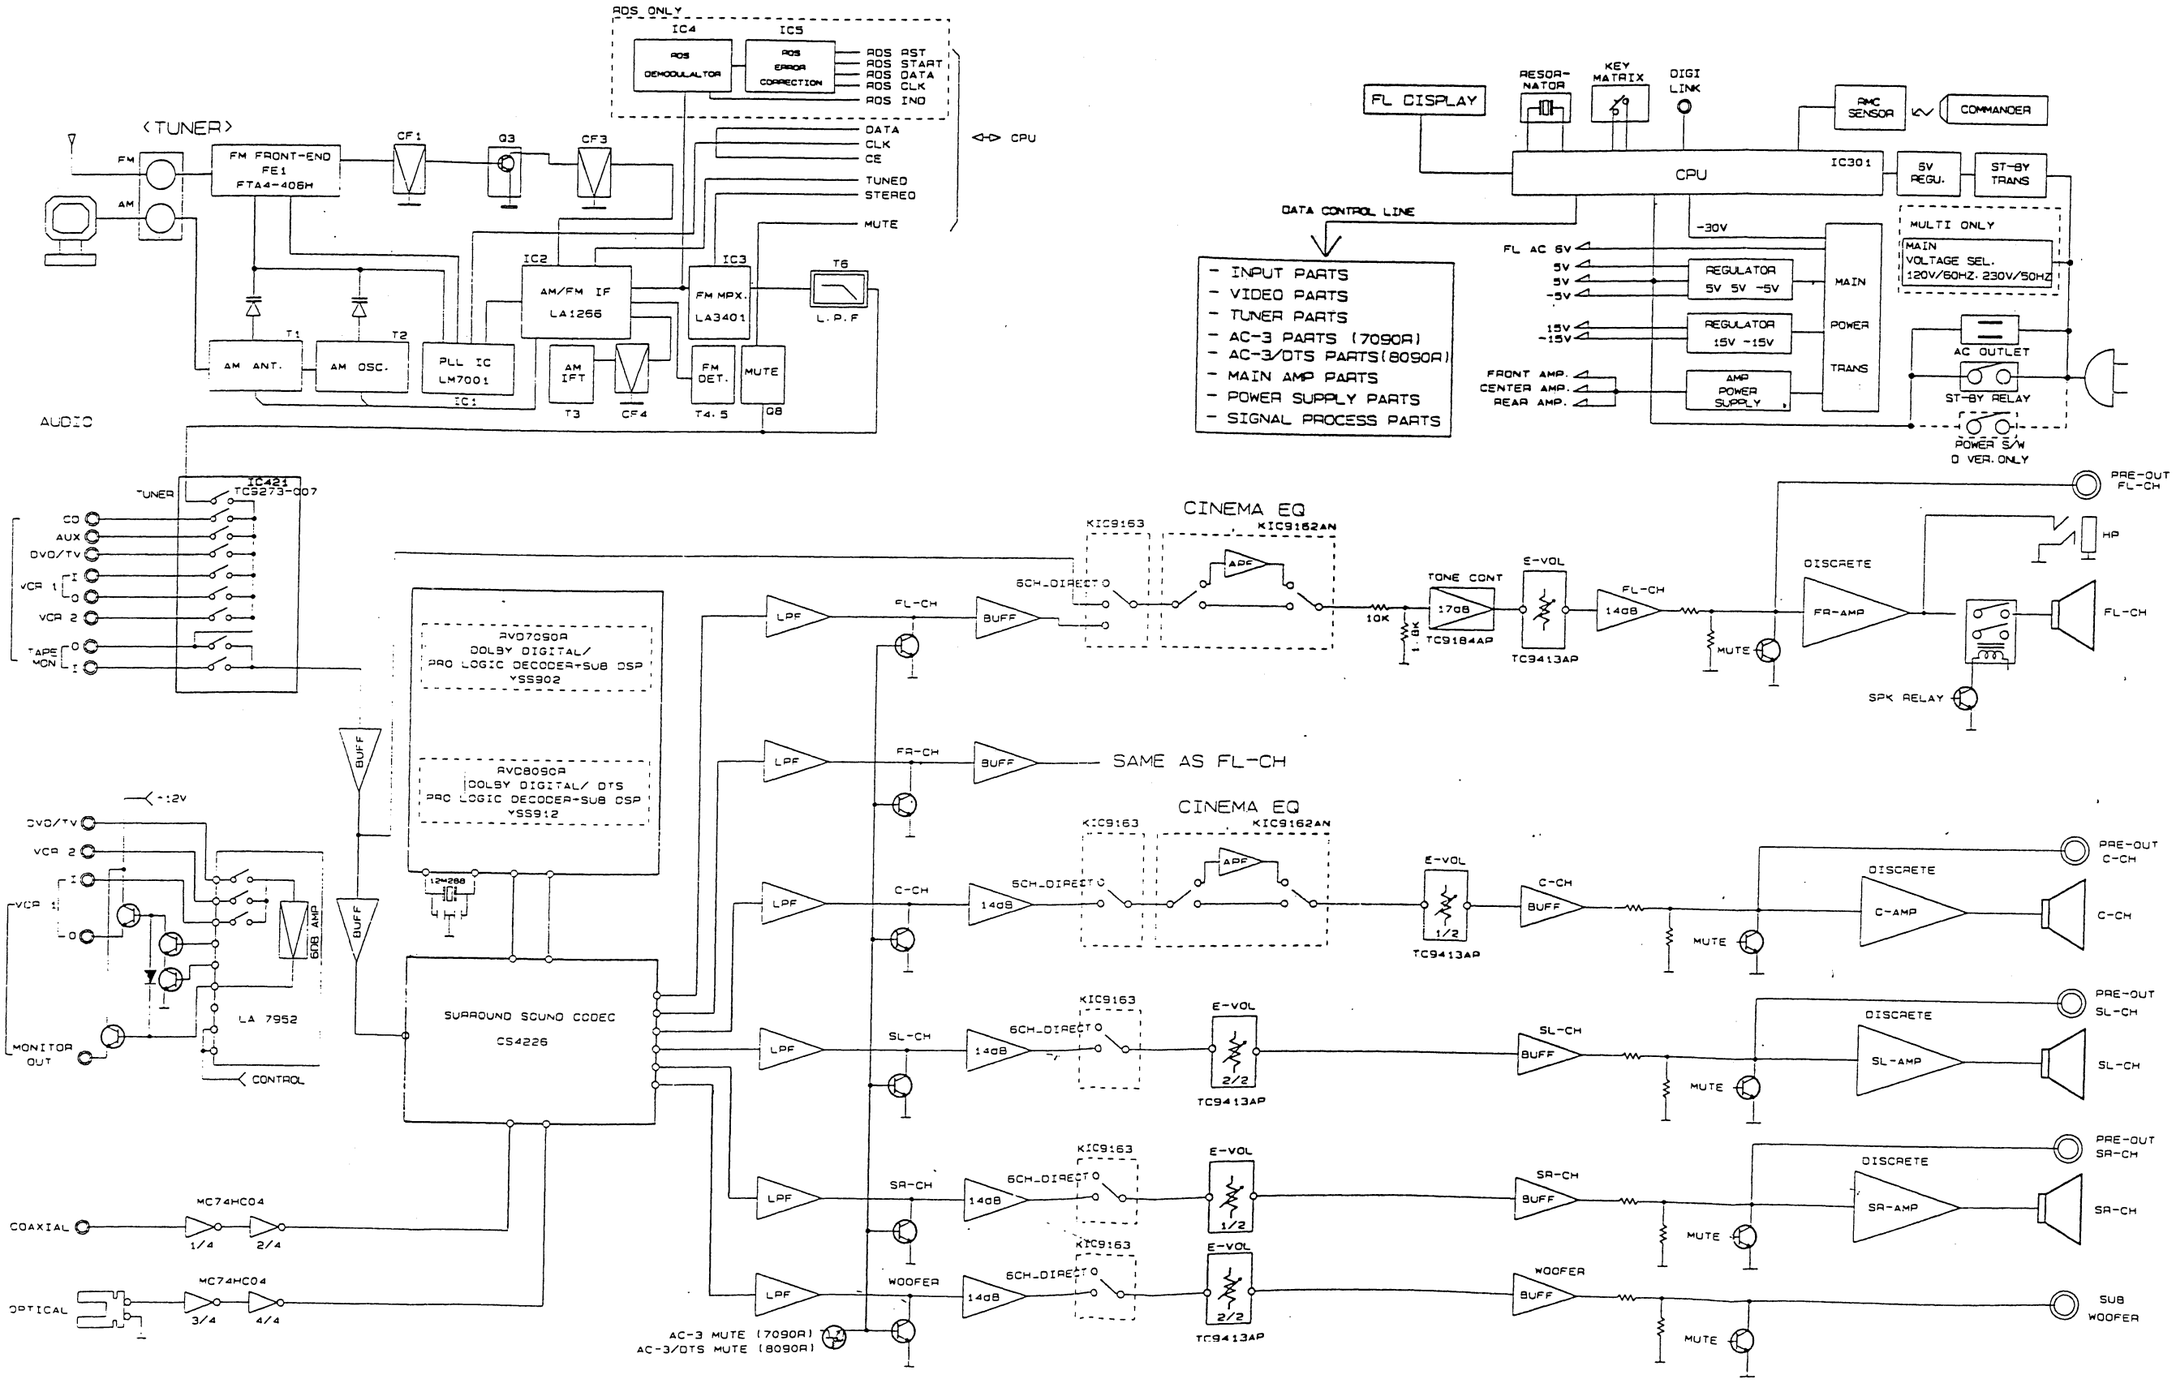

SCHEMATIC DIAGRAM (I)

PCB1 (MAIN)

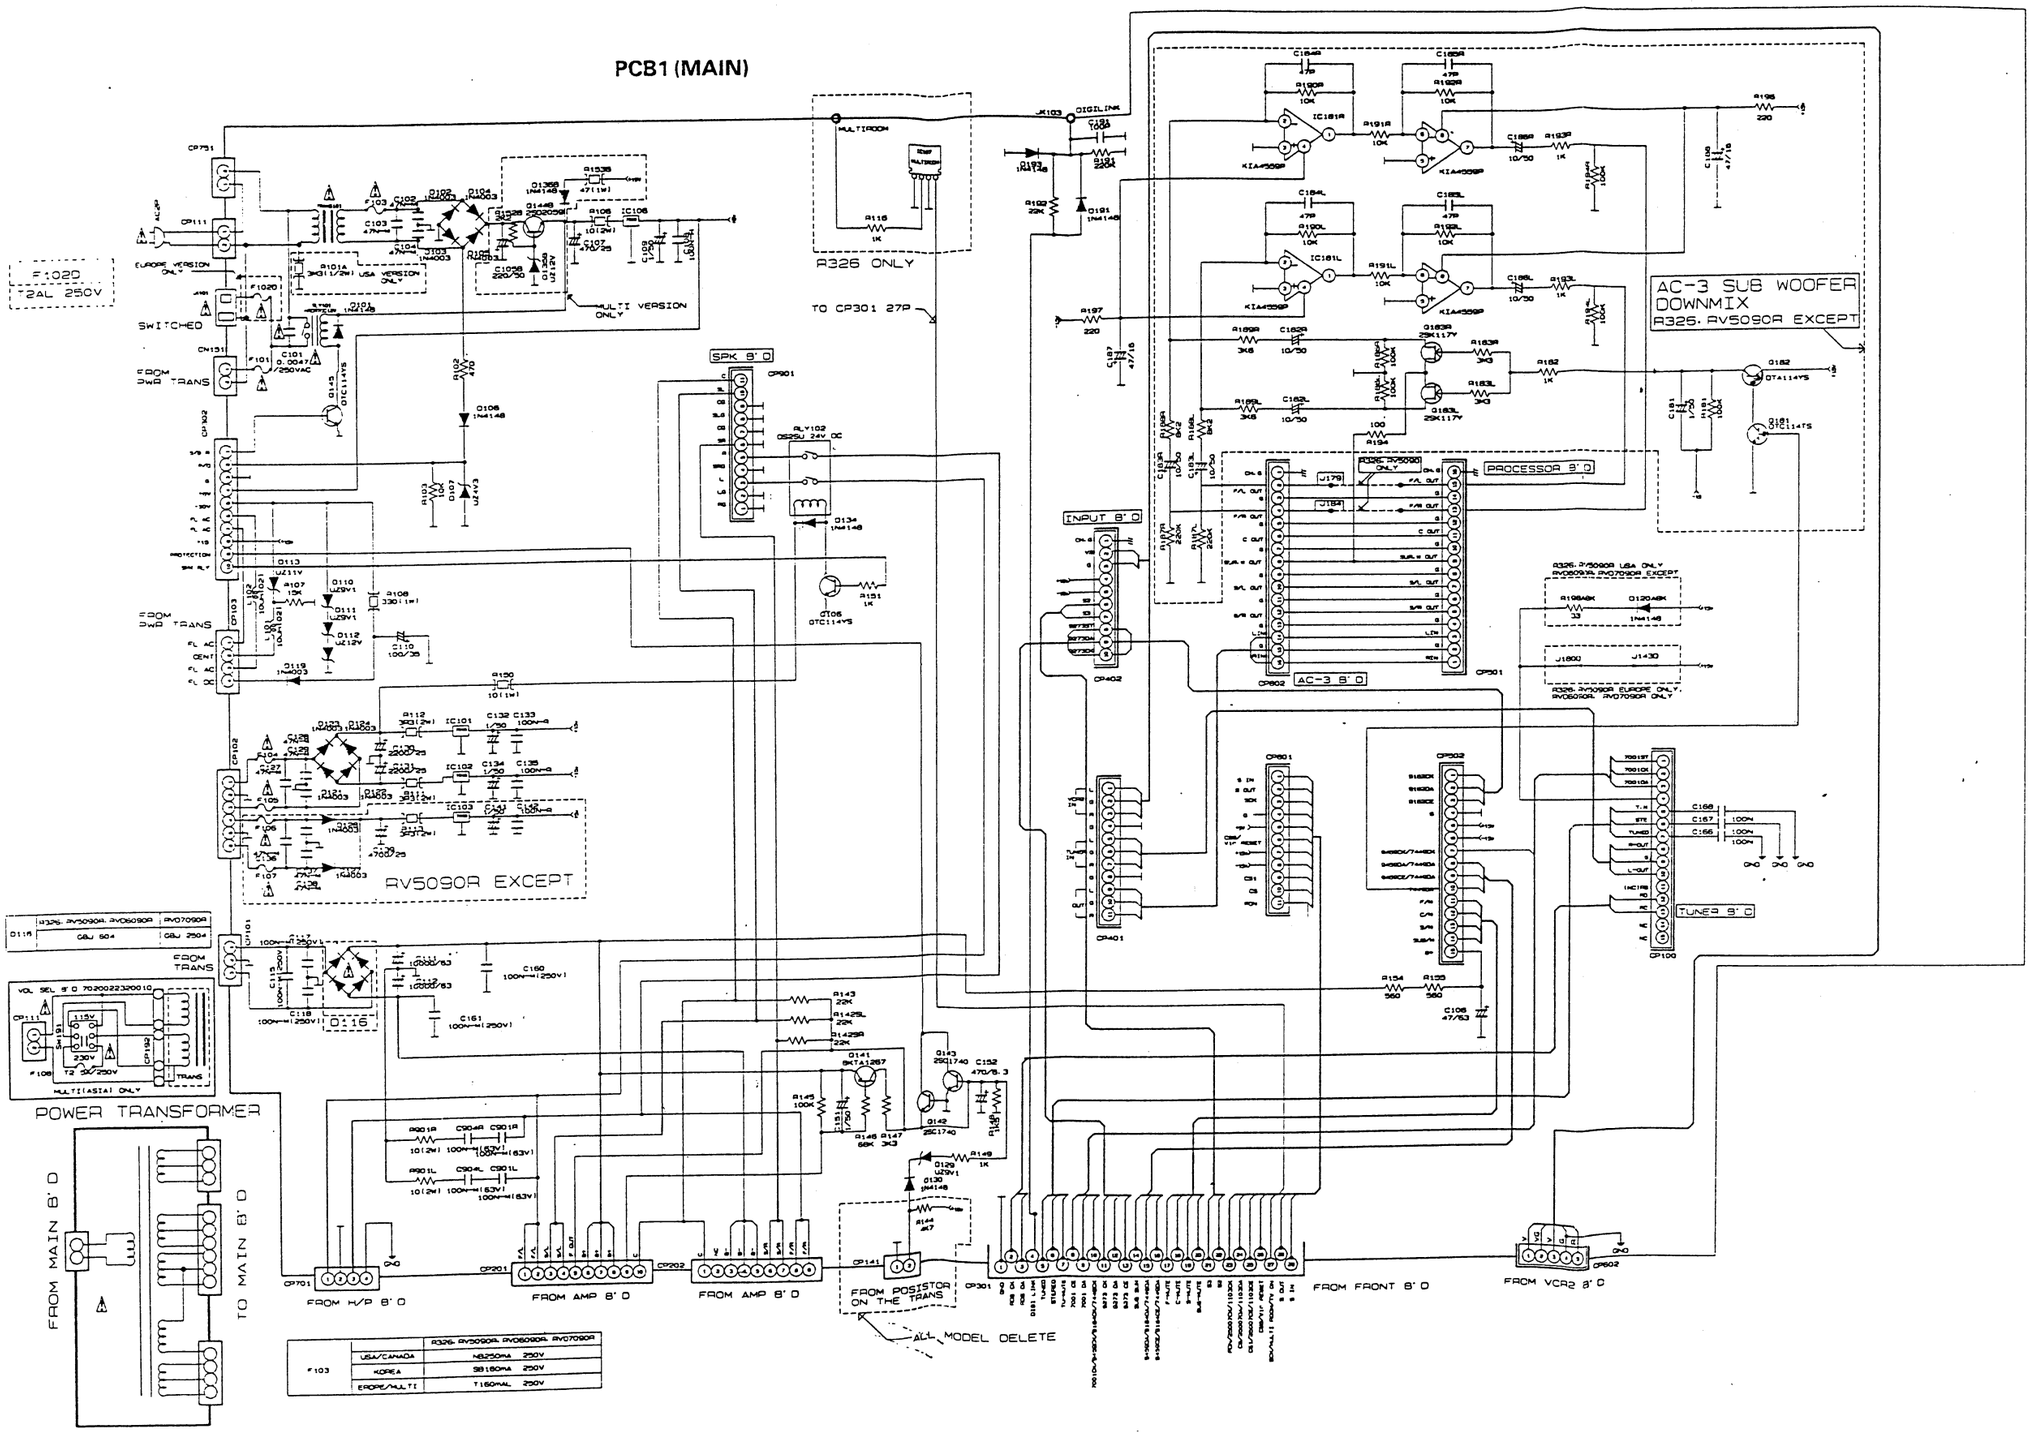

SCHEMATIC DIAGRAM (II)

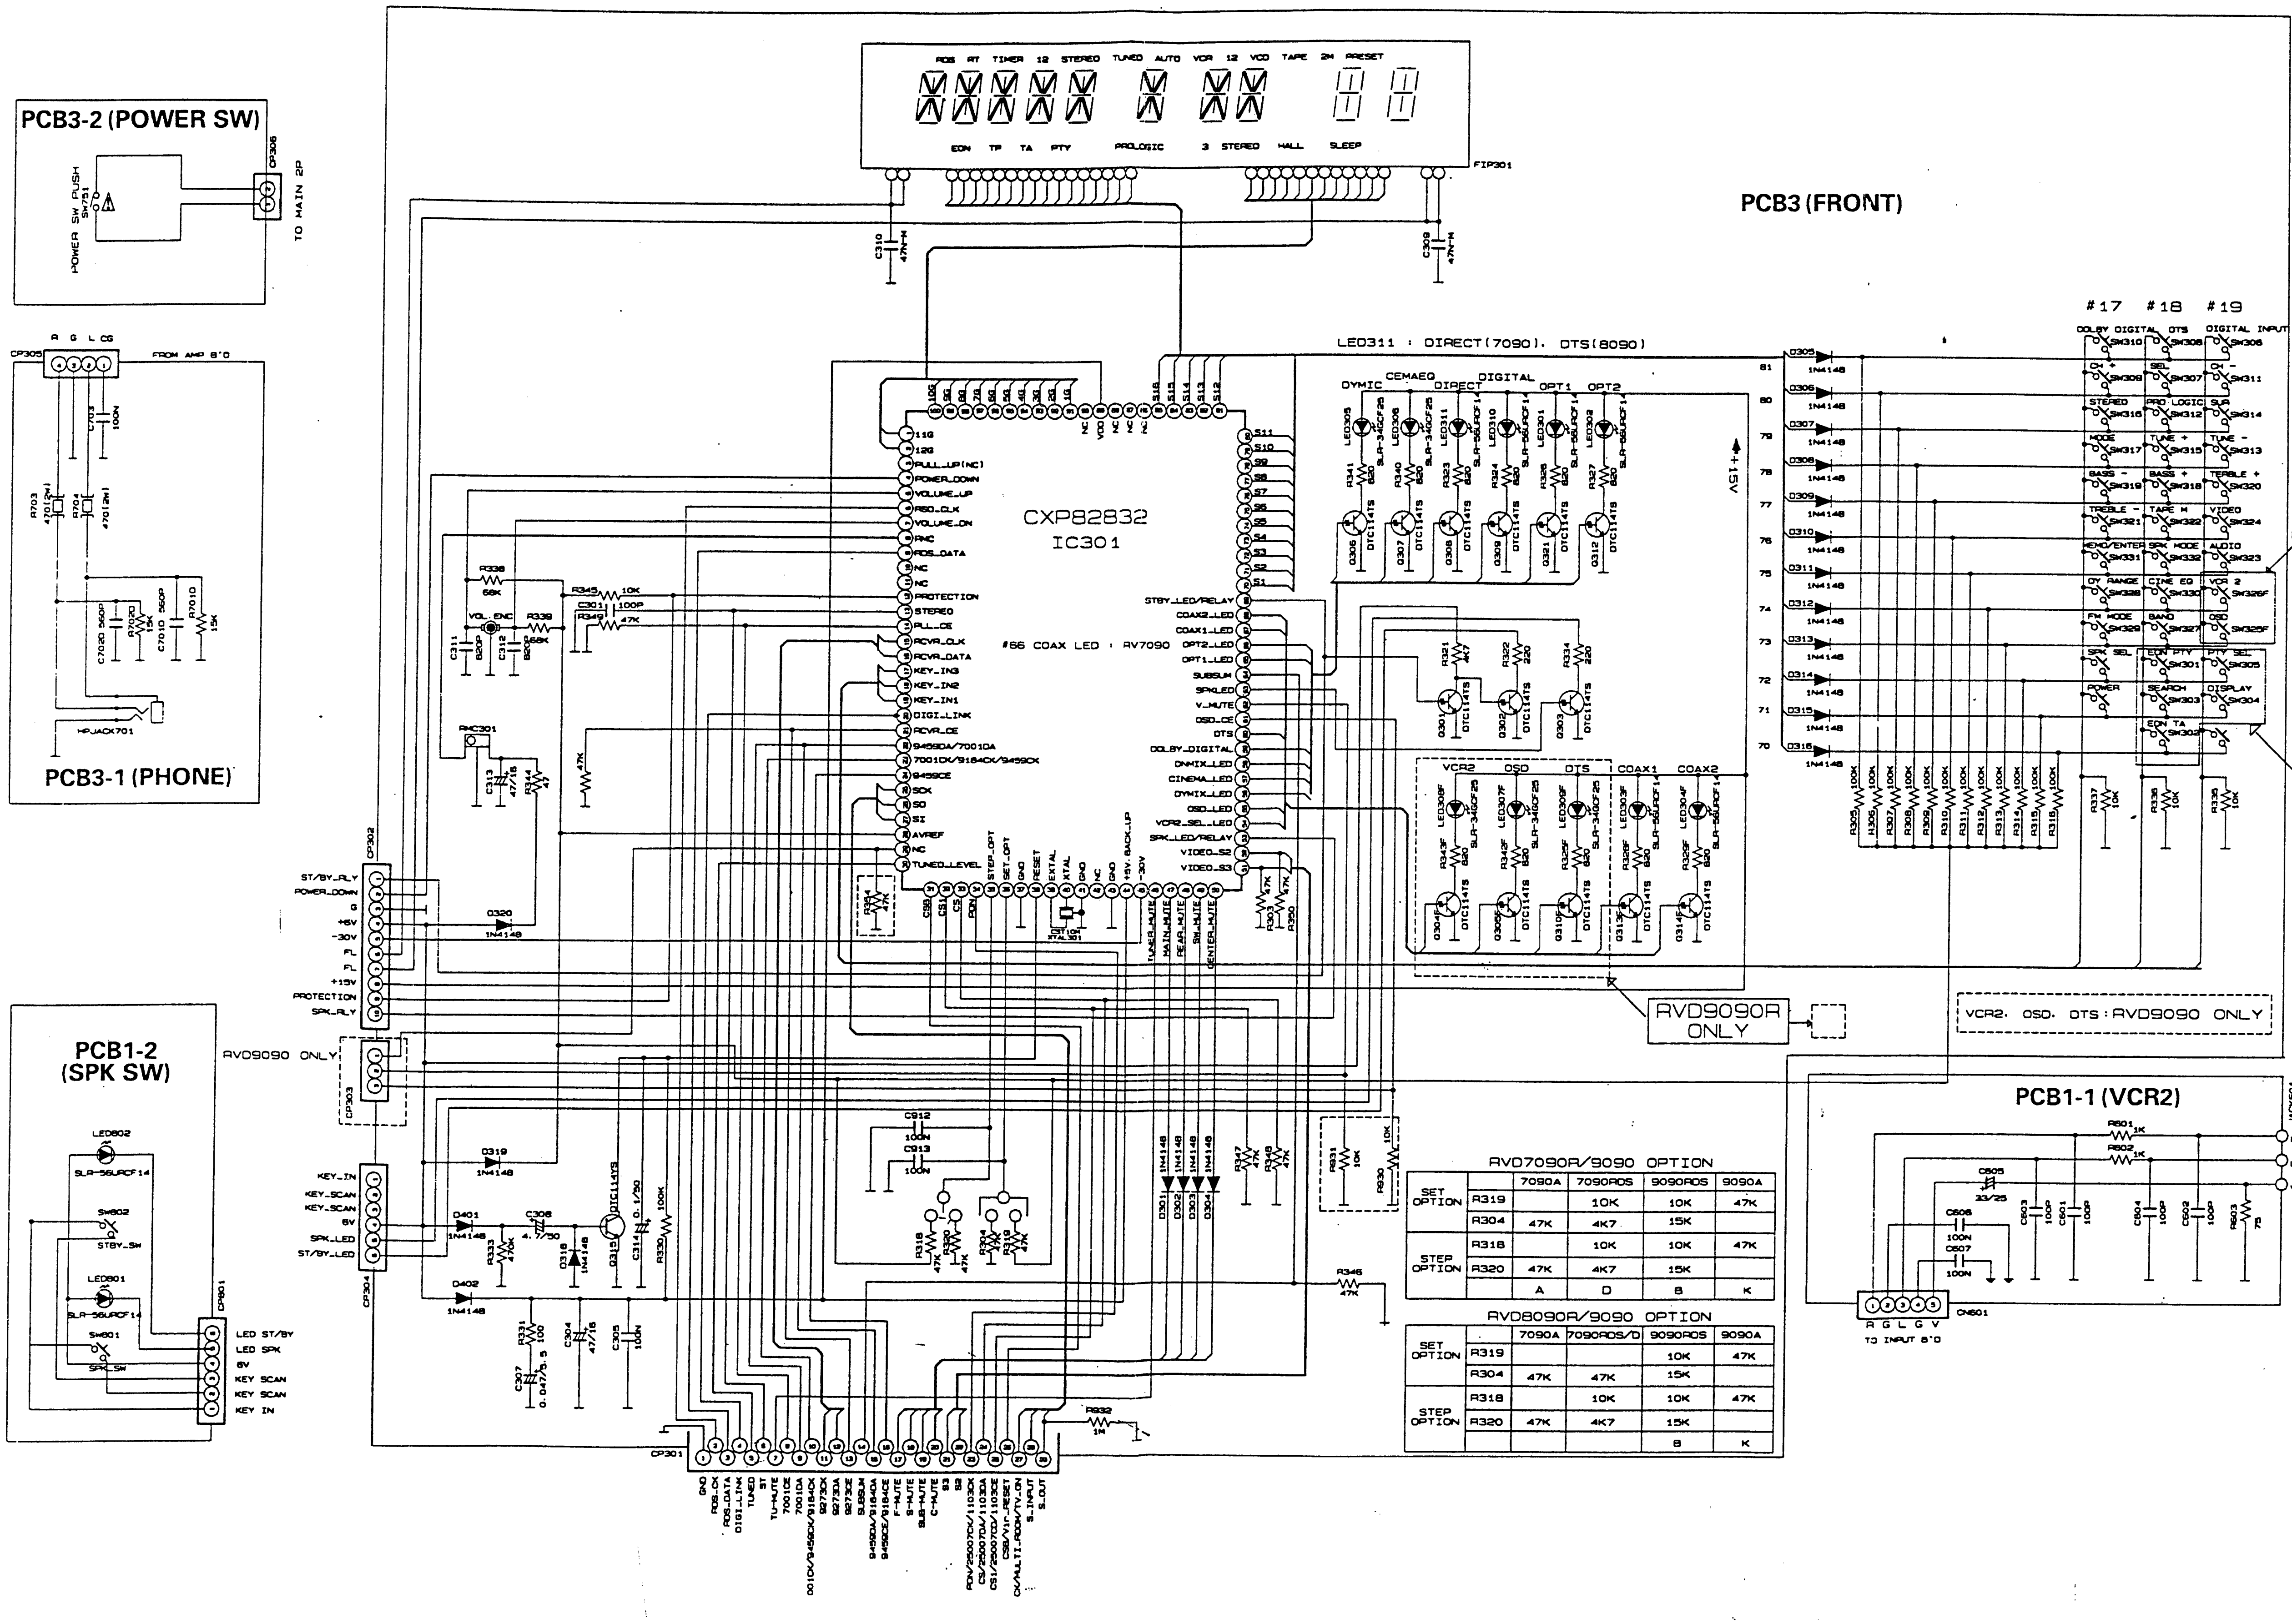
PCB3-2 (POWER SW)
POWER SW PUSH SW751
CP306
TO MAIN 2P
PCB3-1 (PHONE)
CP305
FROM AMP B'D
HPJACK701
PCB3 (FRONT)
FIP301
CXP82832
IC301
#66 COAX LED : RV7090
LED311 : DIRECT(7090). DTS(8090)
#17 #18 #19
RVD9090R ONLY
RDS ONLY
VCR2. OSD. DTS : RVD9090 ONLY
CP302
CP303
RVD9090 ONLY
CP304
PCB1-2 (SPK SW)
CP801
CP301
PCB1-1 (VCR2)
JACK601
VCR2 INPUT JACK
CN601
TO INPUT B'D

RVD7090R/9090 OPTION

		7090A	7090RDS	9090RDS	9090A
SET OPTION	R319		10K	10K	47K
	R304	47K	4K7	15K	
STEP OPTION	R318		10K	10K	47K
	R320	47K	4K7	15K	
		A	D	B	K

RVD8090R/9090 OPTION

		7090A	7090RDS/D	9090RDS	9090A
SET OPTION	R319			10K	47K
	R304	47K	47K	15K	
STEP OPTION	R318		10K	10K	47K
	R320	47K	4K7	15K	
				B	K

SCHEMATIC DIAGRAM (Ⅲ)

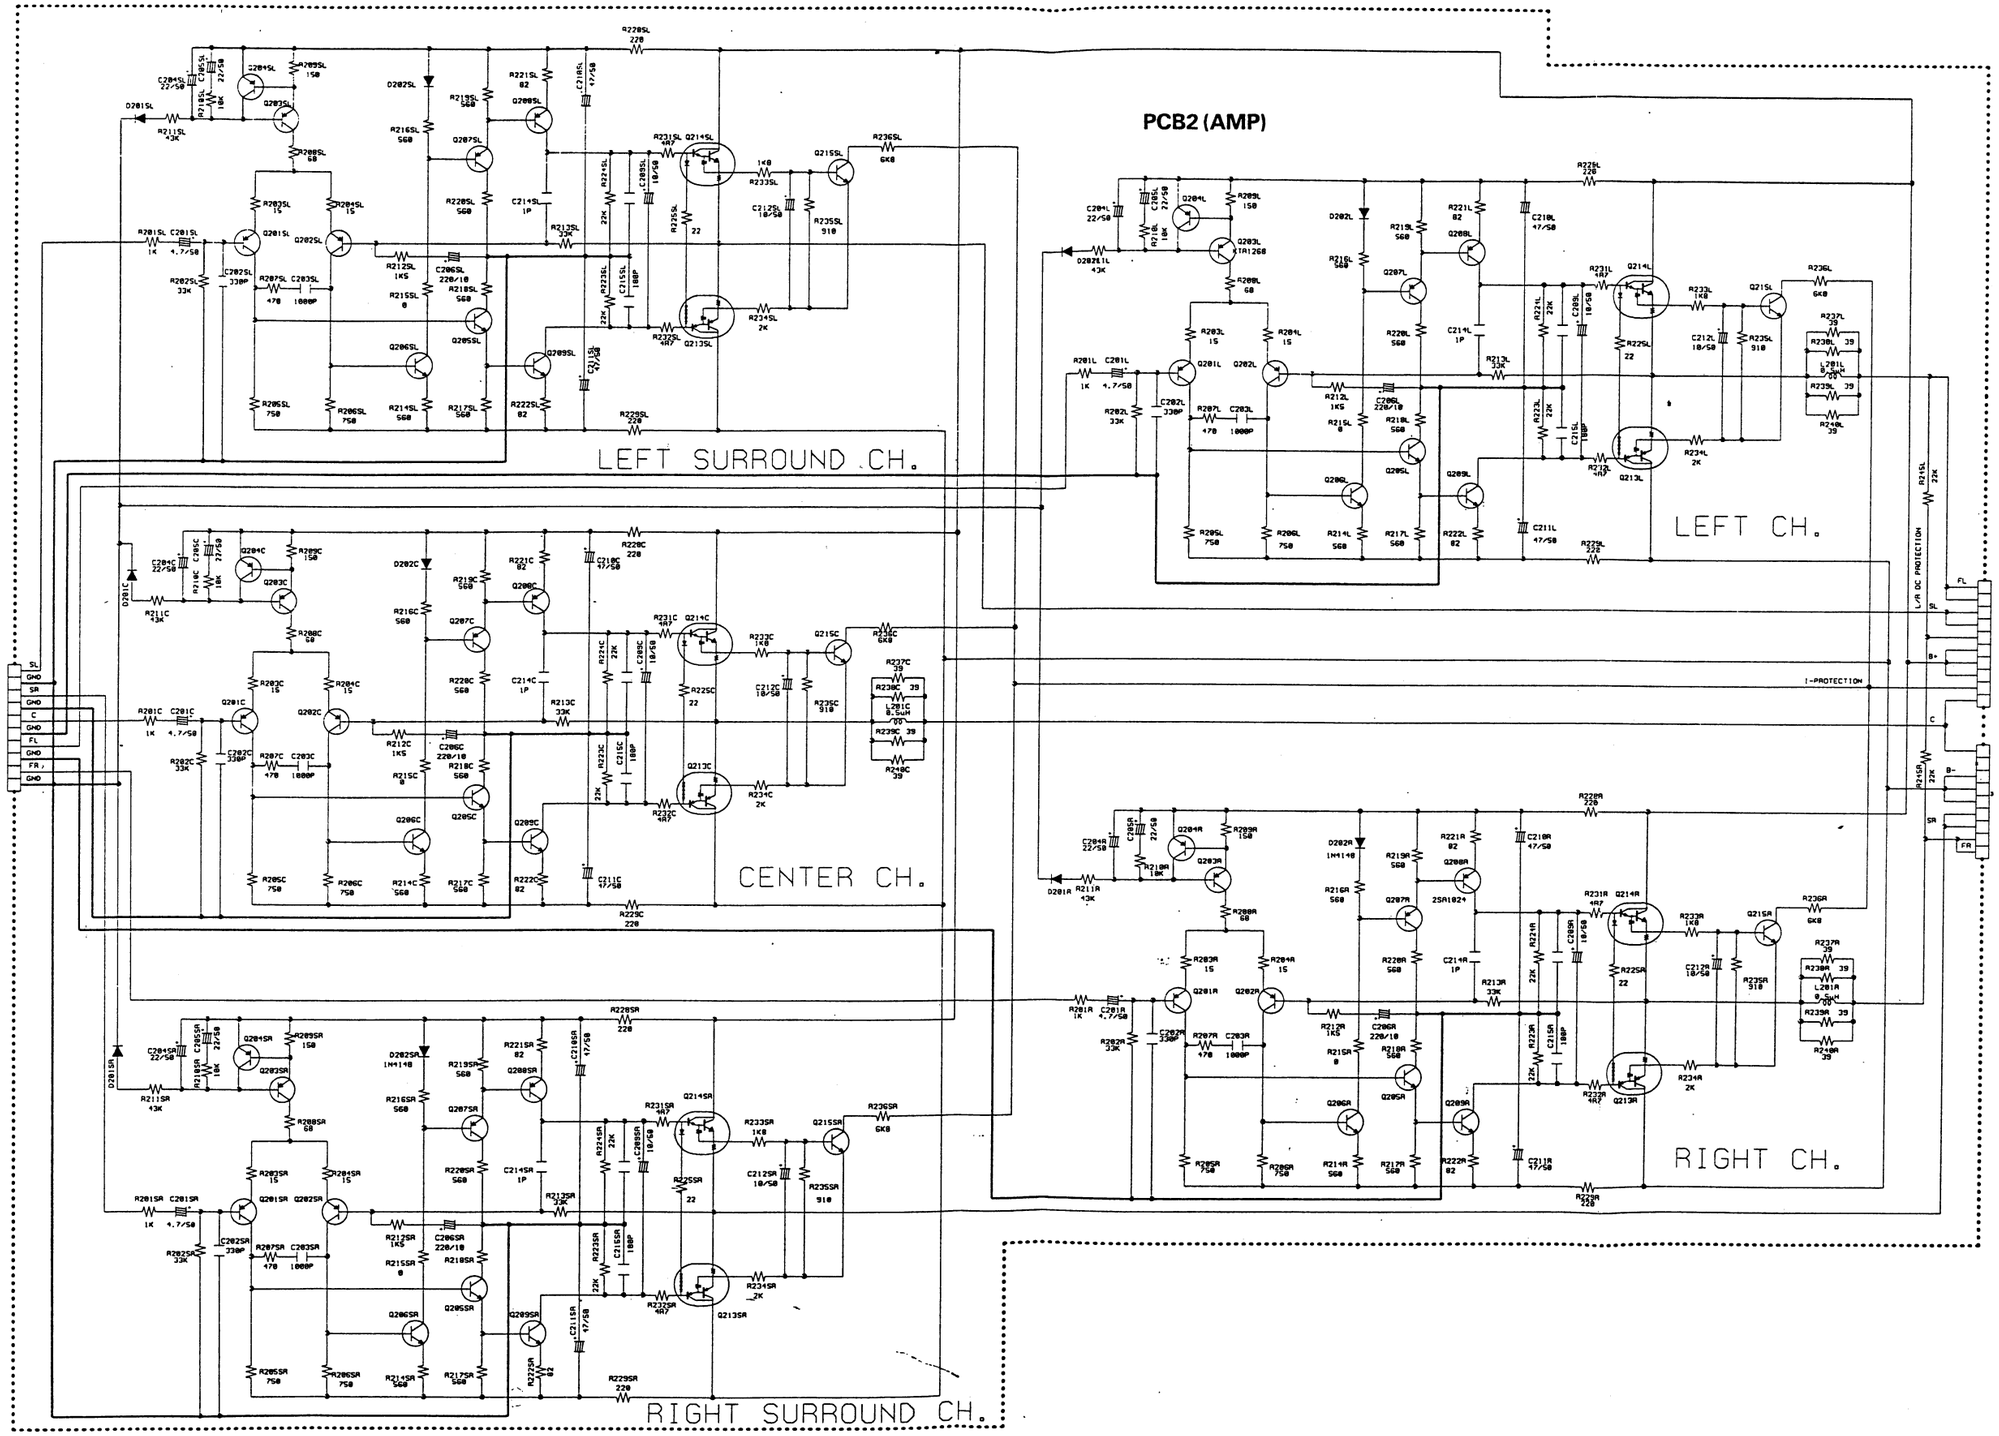

SCHEMATIC DIAGRAM (IV)

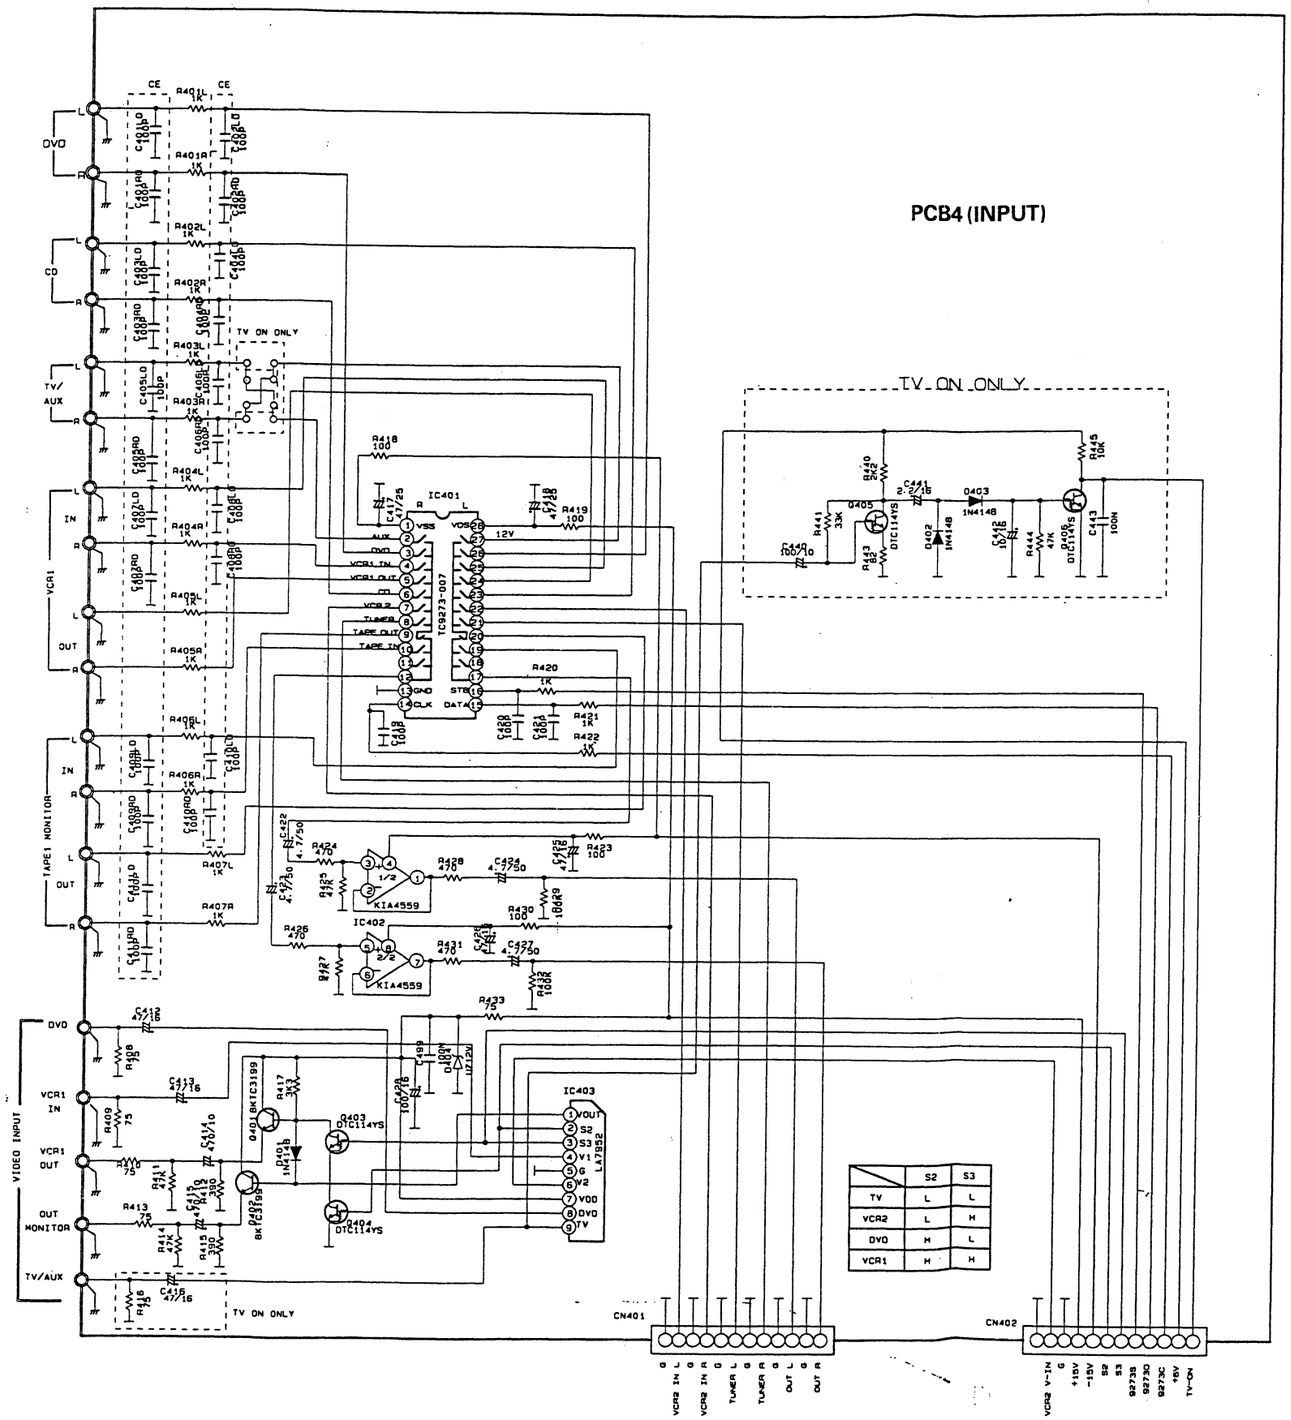

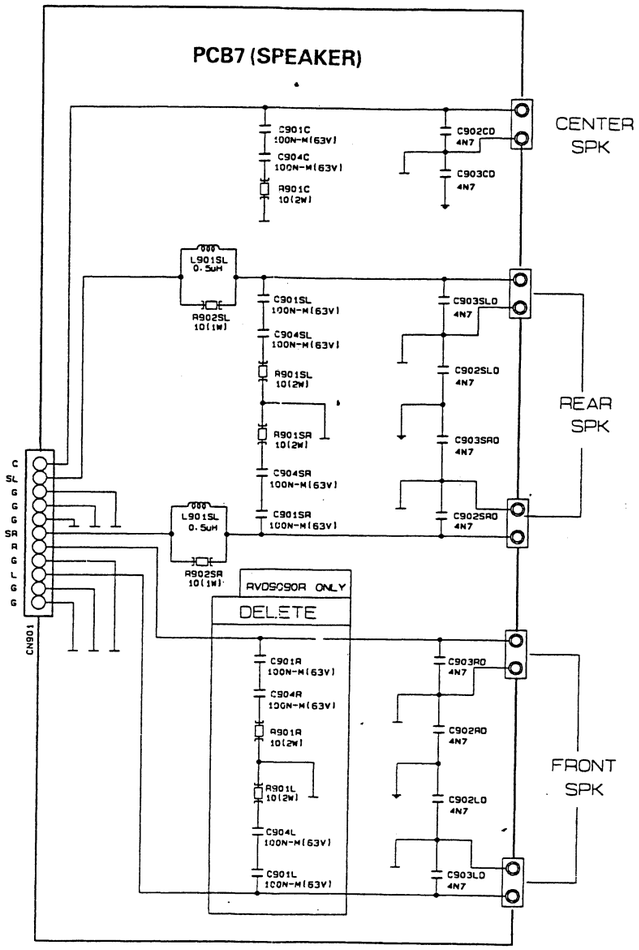

SCHEMATIC DIAGRAM (V)

PCB5 (PROCESSOR)

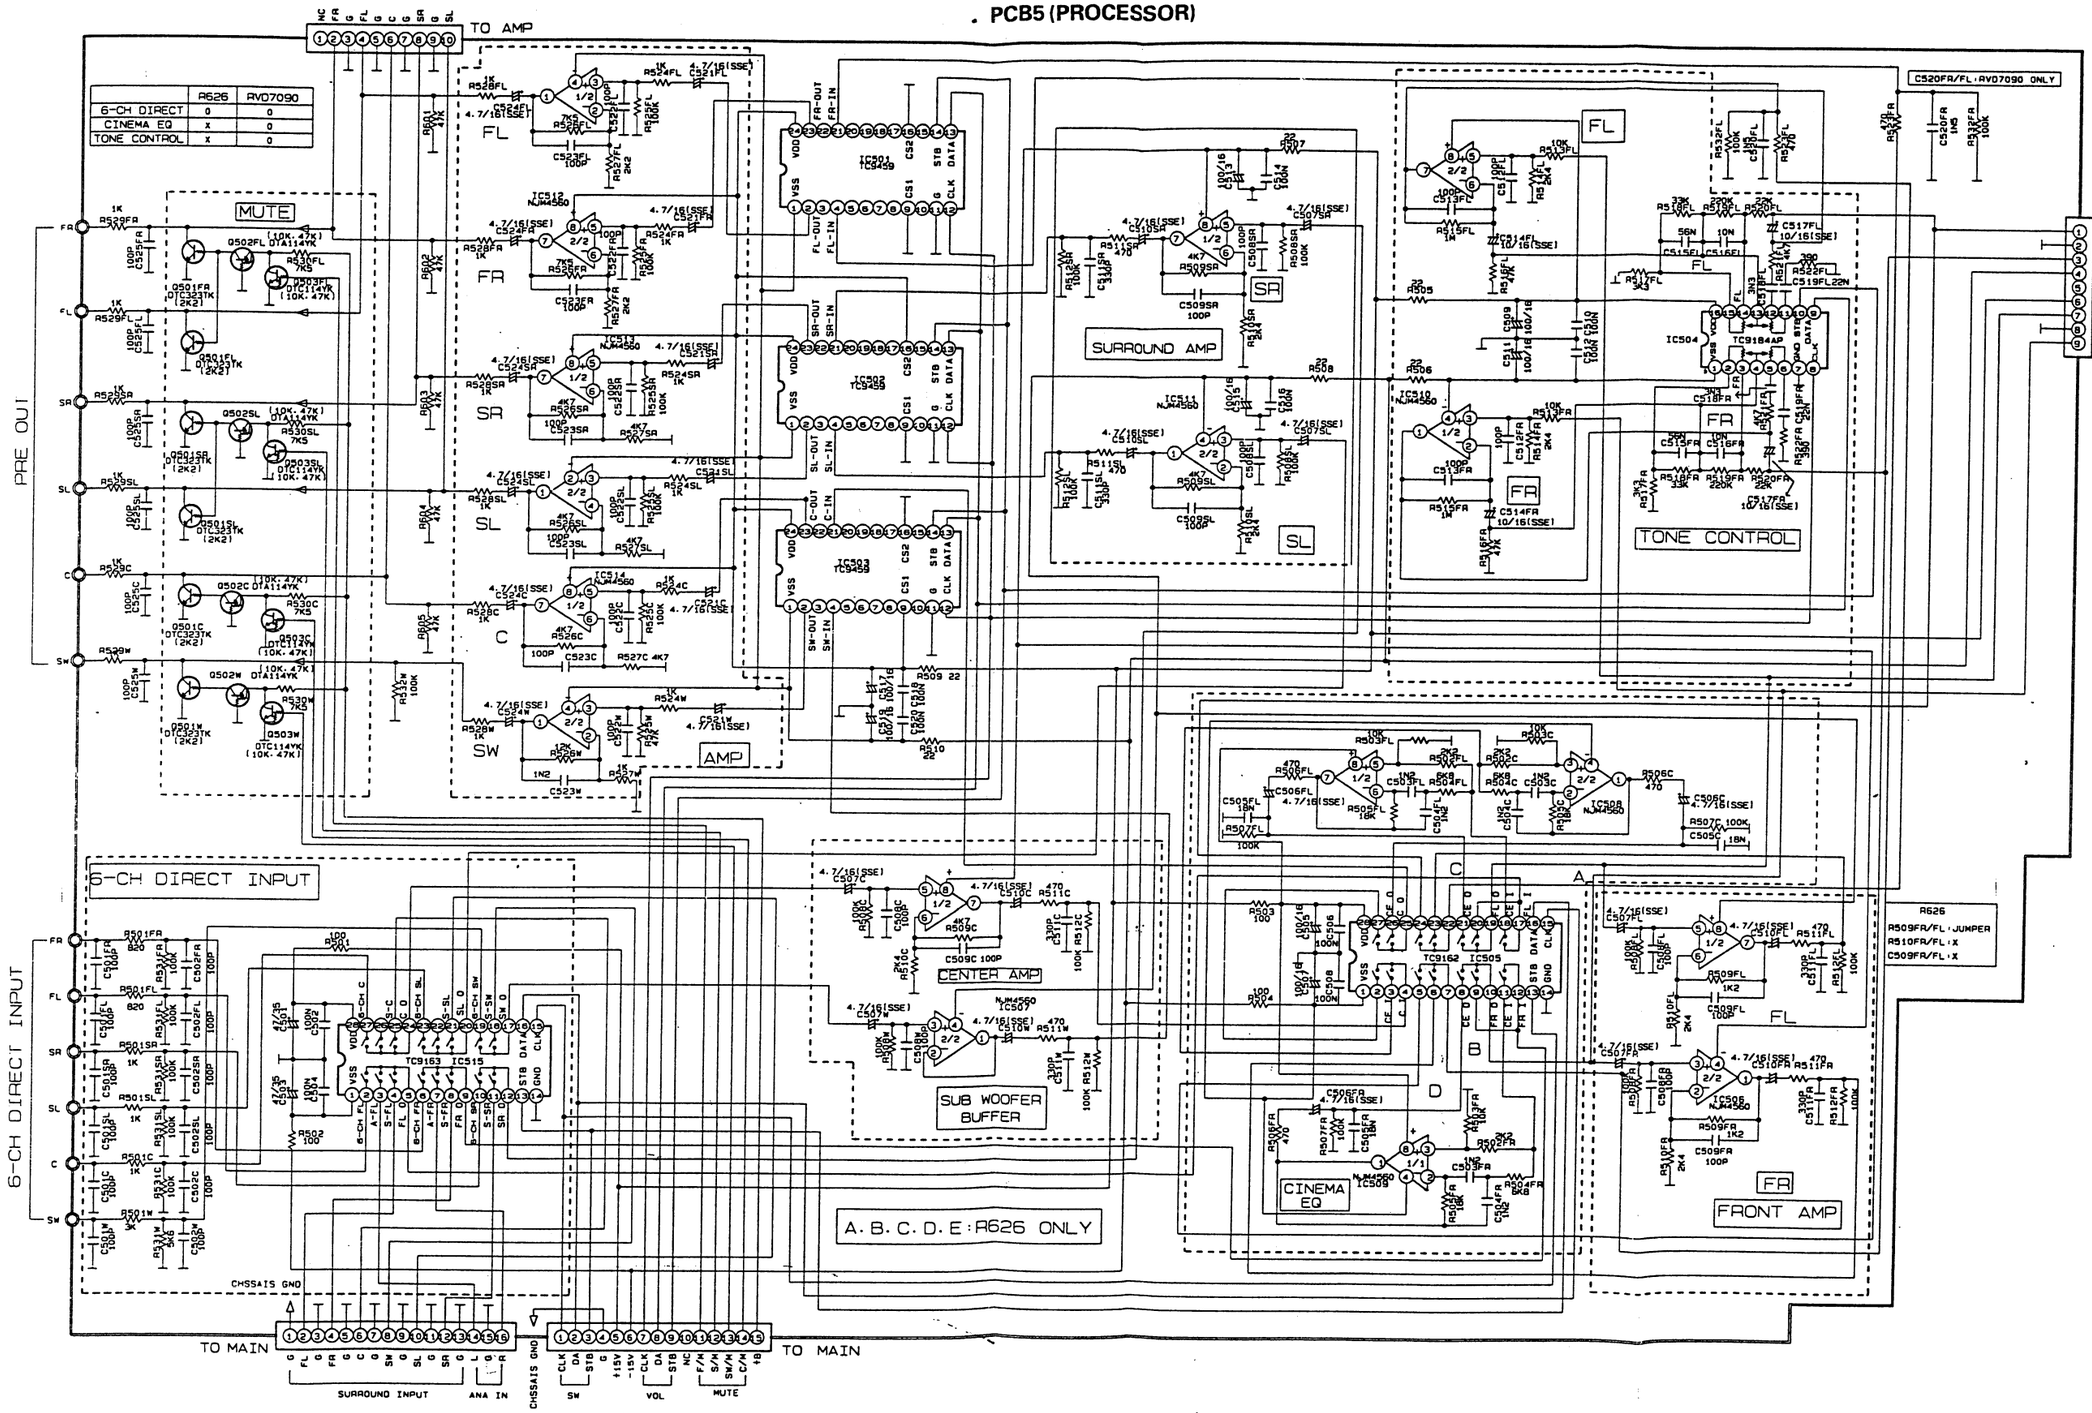

SCHEMATIC DIAGRAM (VI)

PCB6 (AC-3)

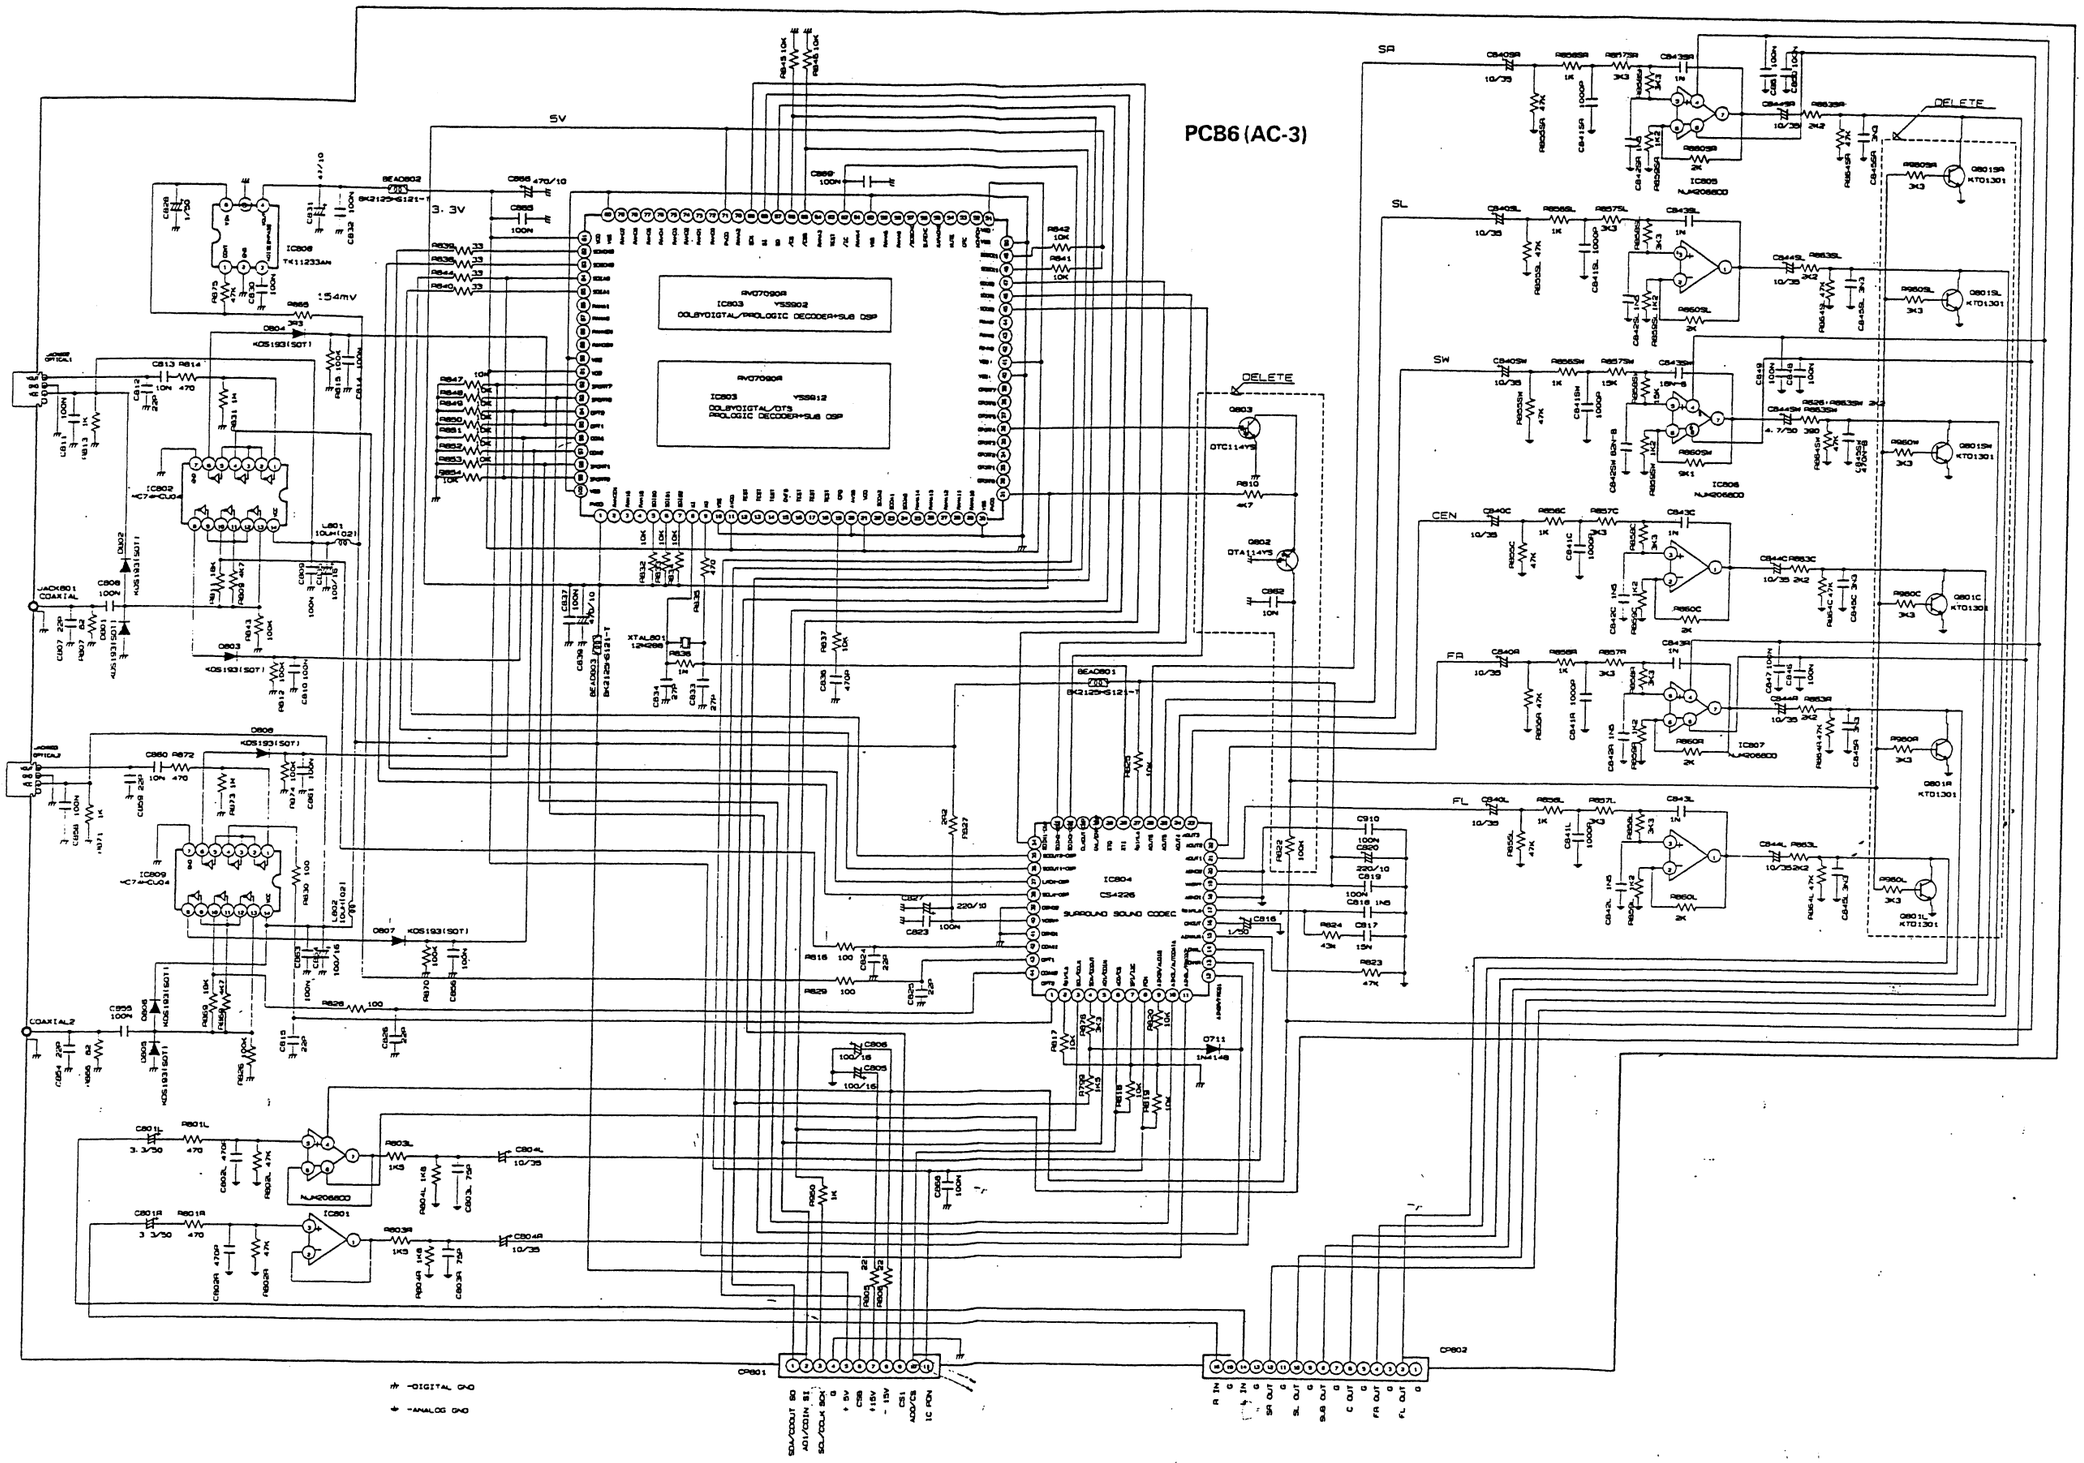

SCHEMATIC DIAGRAM (VI)

PCB6 (AC-3)

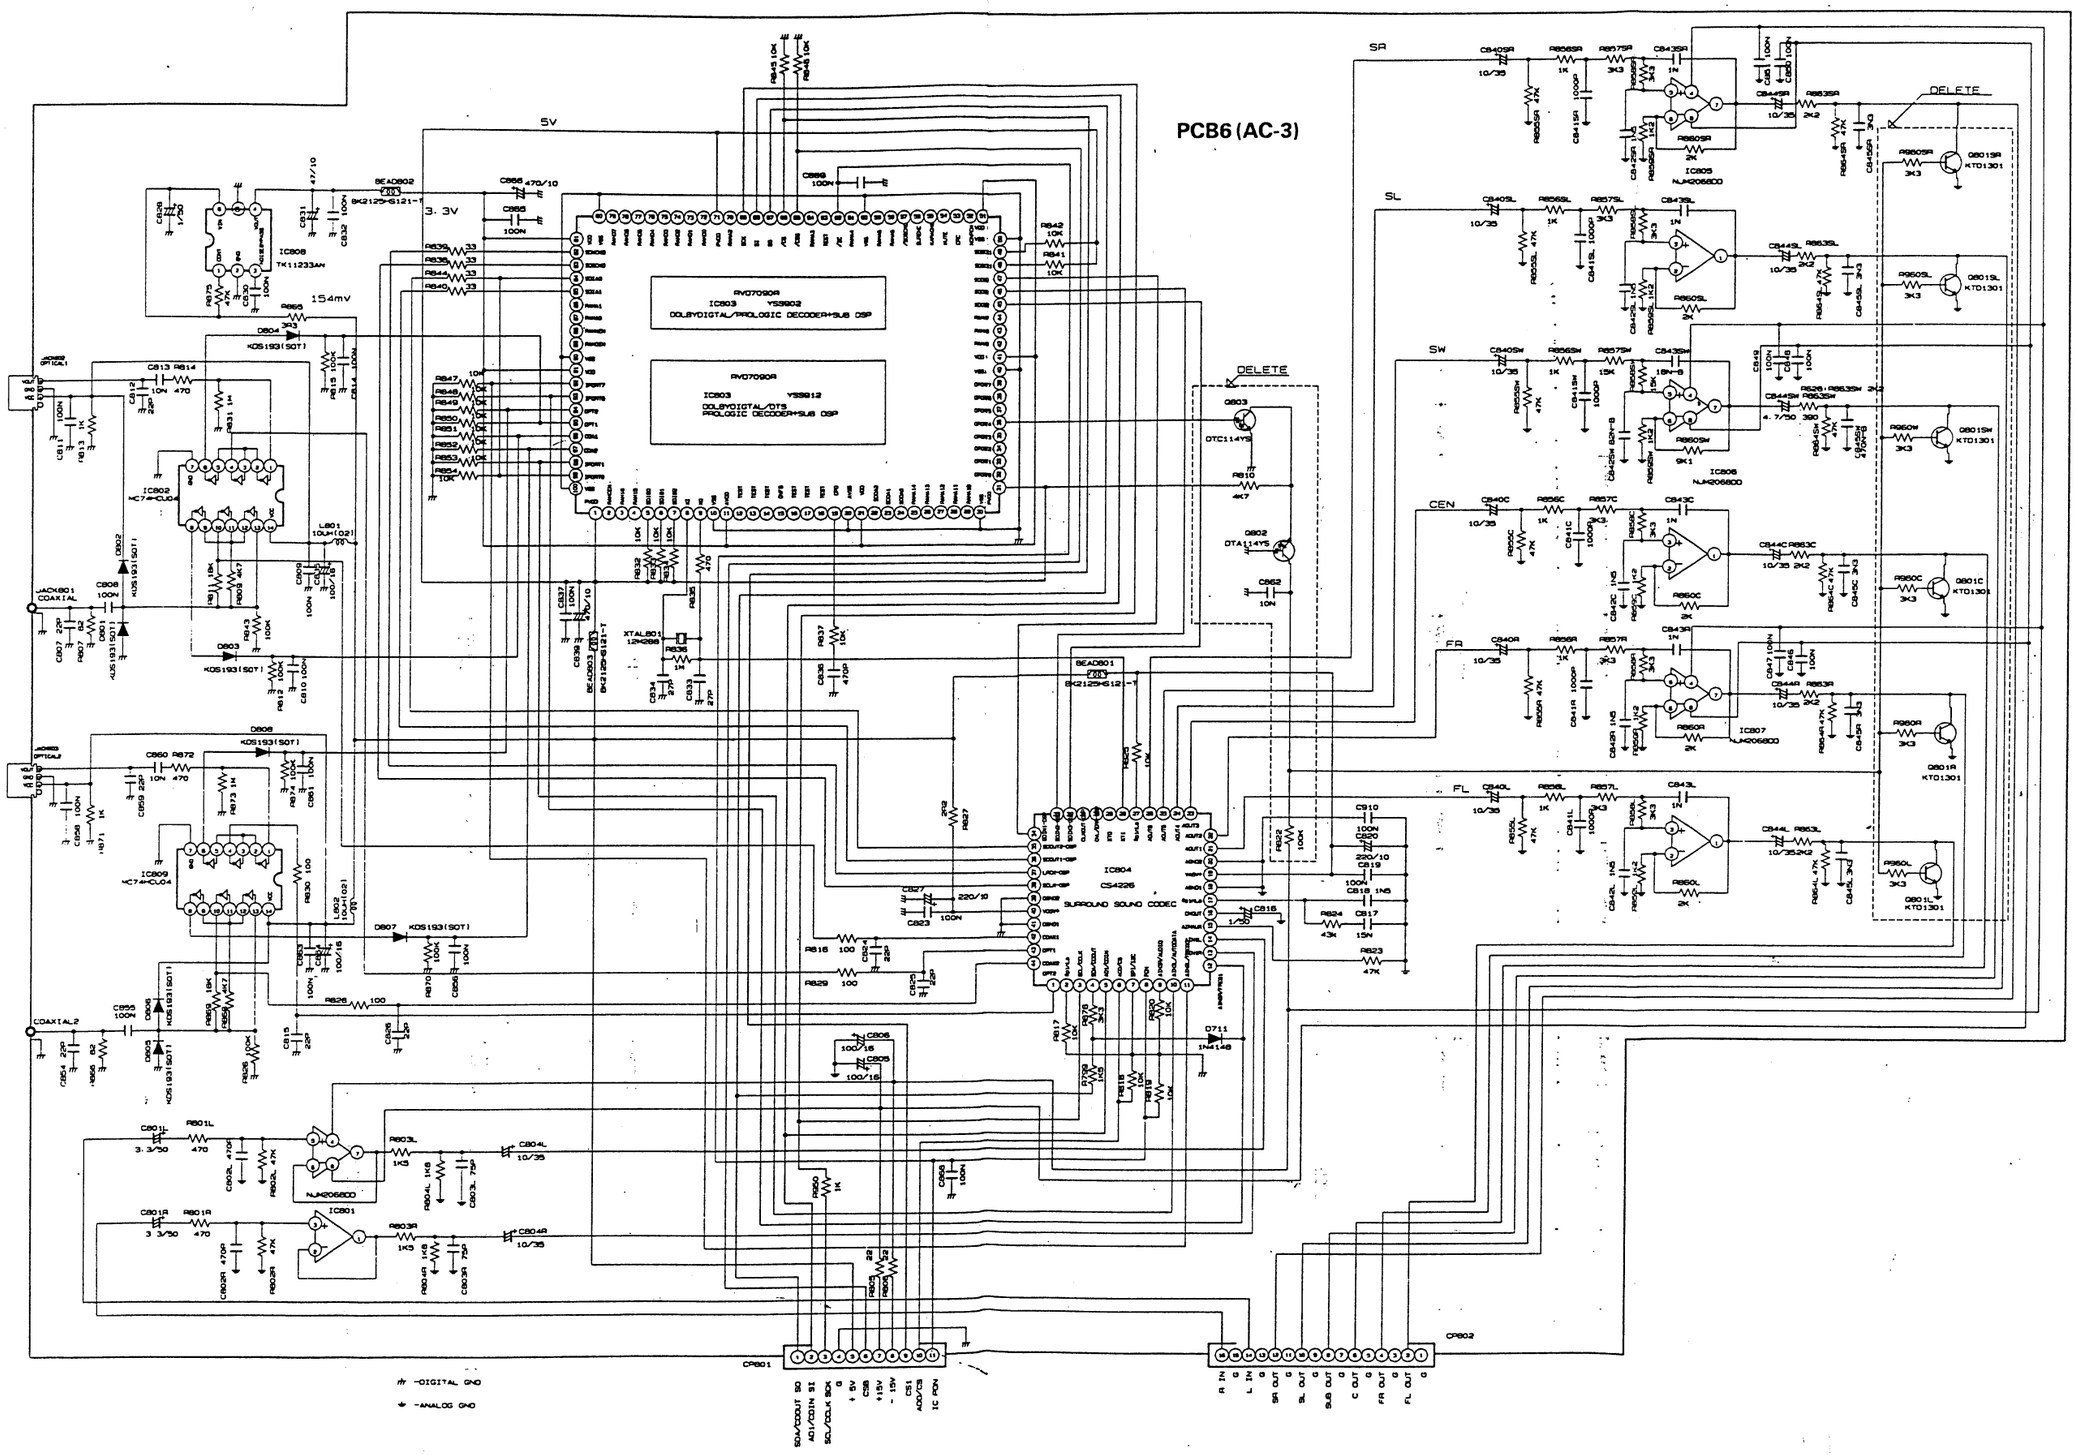

SCHEMATIC DIAGRAM (VII)

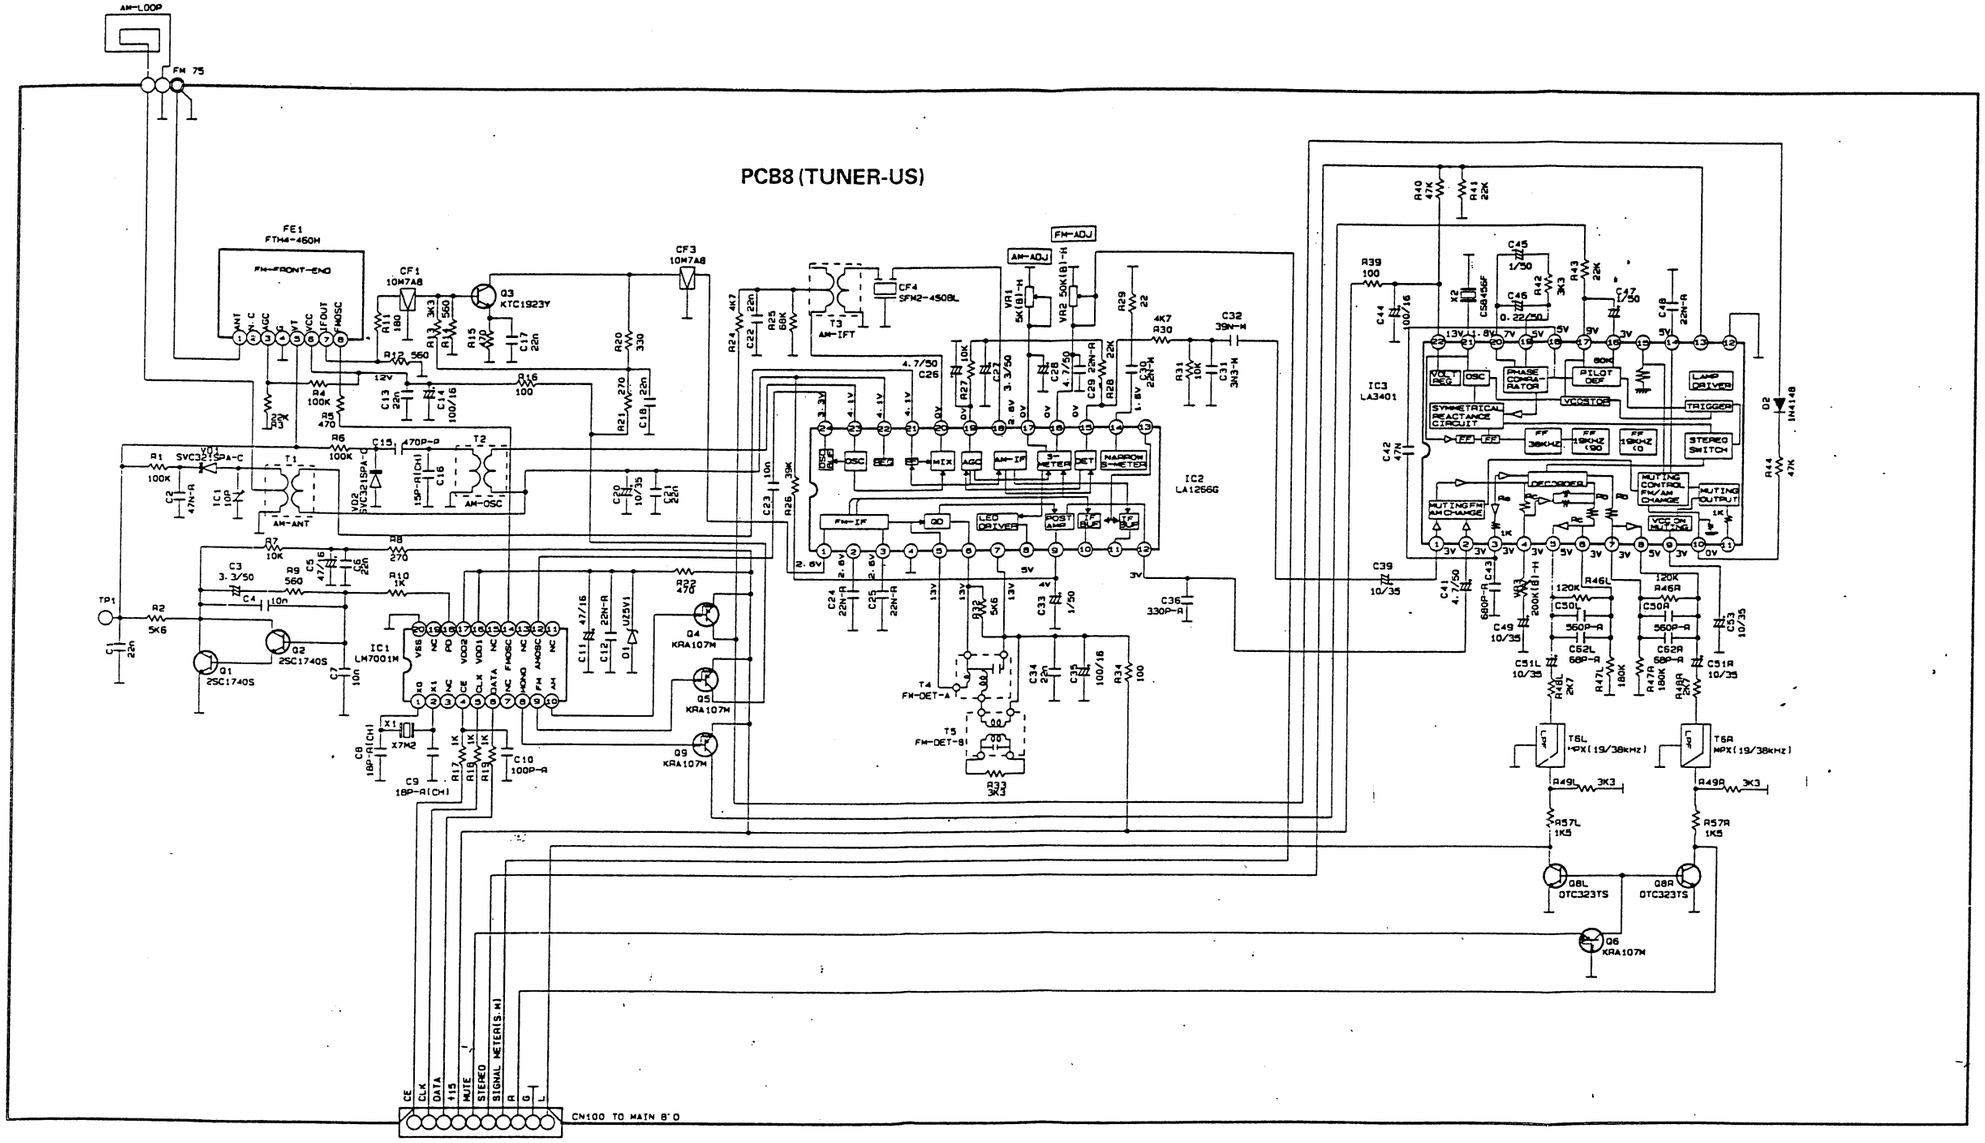

SCHEMATIC DIAGRAM (VIII)

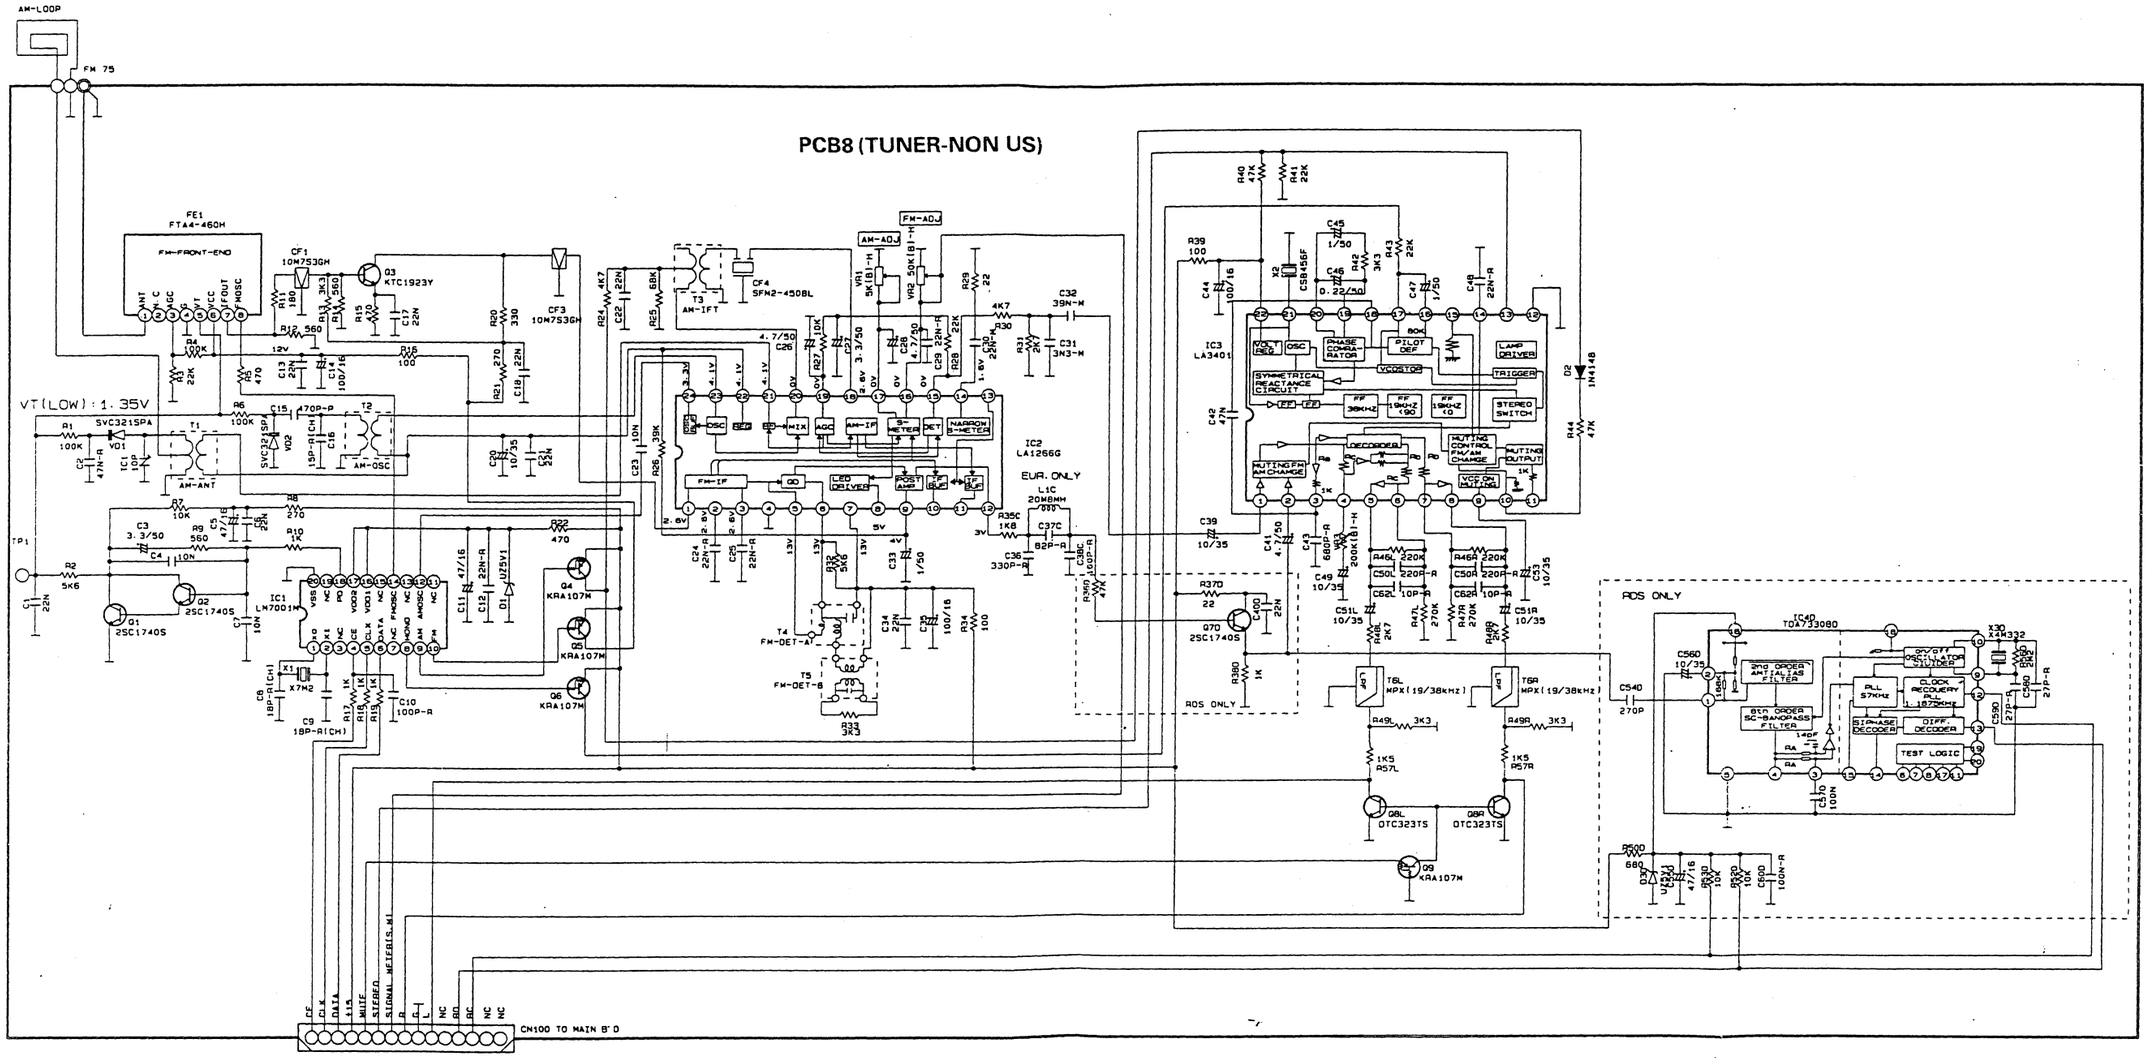

ELECTRICAL PARTS LIST

NO	DESCRIPTION		PARTS NO
PCB1	**ASSEMBLY P.C.BOARD MAIN**		**7025HK9902021**
C101	CERAMIC AC(SAFETY)	DE7150-487F 472MVAI	D00847208K03D
C102	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C103	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C104	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C105	ELECT GE 85C	470UF-M/16V	D040471083020
C106	ELECT GE 85C	47UF-M/63V	D040470088100
C108	CERAMIC SEMI DISC	F0.1UF-Z/50V	D006104597050
C109	ELECT GE 85C	1UF-M/50V	D040010087050
C110	ELECT GE 85C	100UF-M/35V,8*11.5	D040101085100
C115	FILM POLYESTER	RED-0.1UF-K/250V	D02010407H080
C117	FILM POLYESTER	RED-0.1UF-K/250V	D02010407H080
C118	FILM POLYESTER	RED-0.1UF-K/250V	D02010407H080
C127	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C128	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C129	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C130	ELECT GE 85C	2200UF-M/25V	D040222084200
C131	ELECT GE 85C	2200UF-M/25V	D040222084200
C132	ELECT GE 85C	1UF-M/50V	D040010087050
C133	CERAMIC SEMI DISC	F0.1UF-Z/50V	D006104597050
C134	ELECT GE 85C	1UF-M/50V	D040010087050
C135	CERAMIC SEMI DISC	F0.1UF-Z/50V	D006104597050
C136	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C137	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C138	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C139	ELECT GE 85C	4700UF-M/25V	D040472084210
C141	ELECT GE 85C	1UF-M/50V	D040010087050
C142	CERAMIC SEMI DISC	F0.1UF-Z/50V	D006104597050
C151	ELECT GE 85C	1UF-M/50V	D040010087050
C152	ELECT GE 85C	470UF-M/10V	D040471082060
C160	FILM POLYESTER	RED-0.1UF-K/250V	D02010407H080
C161	FILM POLYESTER	RED-0.1UF-K/250V	D02010407H080
C166	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C167	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C168	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C181	ELECT GE 85C	1UF-M/50V	D040010087050
C182L	ELECT GE 85C	10UF-M/50V	D040100087060
C182R	ELECT GE 85C	10UF-M/50V	D040100087060
C183L	ELECT GE 85C	10UF-M/50V	D040100087060
C183R	ELECT GE 85C	10UF-M/50V	D040100087060
C184L	CERAMIC T.C AXIAL	SL47PF-J/50V	D001470067520
C184R	CERAMIC T.C AXIAL	SL47PF-J/50V	D001470067520
C185L	CERAMIC T.C AXIAL	SL47PF-J/50V	D001470067520
C185R	CERAMIC T.C AXIAL	SL47PF-J/50V	D001470067520
C186L	ELECT GE 85C	10UF-M/50V	D040100087060
C186R	ELECT GE 85C	10UF-M/50V	D040100087060
C187	ELECT GE 85C	47UF-M/16V	D040470083100

NO	DESCRIPTION		PARTS NO
C188	ELECT GE 85C	47UF-M/16V	D040470083100
C191	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C901L	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
C901R	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
C904L	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
C904R	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
CN151	CN.WAFER 3.96MM		L104353280200
CP100	CN.WAFER 2.5MM		L102532911910
CP101	CN.WAFER 3.96MM		L104353280300
CP102	CN.WAFER 2.5MM (6P)		L102526700600
CP103	CN.WAFER 2.5MM (4P)		L102526700400
CP111	CN.WAFER 7.92MM (2P)		L108039602010
CP201	CN.WAFER 2.5MM (10P)		L102526701000
CP202	CN.WAFER 2.5MM (9P)		L102526700900
CP301	CN.FPC 1.25MM (29P)		L131520452910
CP302	CN.WAFER 2.0MM (10P)		L101220100000
CP401	CN.WAFER 2.0MM (11P)		L101353361110
CP402	CN.WAFER 2.0MM (10P)		L101353361010
CP501	CN.WAFER 2.0MM (16P)		L101353361610
CP502	CN.WAFER 2.0MM (15P)		L101353361510
CP601	CN.WAFER 2.0MM (5P)		L101220050000
CP701	CN.WAFER 2.5MM (4P)		L102526700400
CP751	CN.WAFER 3.96MM		L104353280200
CP801	CN.WAFER 2.0MM (11P)		L101353361110
CP802	CN.WAFER 2.0MM (16P)		L101353361610
CP901	CN.WAFER 2.5MM (11P)		L102534211110
D101	1SS133T, SWITCHING		K000013300520
D102	1N4004A, DECTIFIER		K040400400520
D103	1N4004A, DECTIFIER		K040400400520
D104	1N4004A, DECTIFIER		K040400400520
D105	1N4004A, DECTIFIER		K040400400520
D106	1SS133T, SWITCHING		K000013300520
D107	MTZJ4.3BM, ZENER		K06004R344520
D110	MTZJ9.1B, ZENER		K06009R144520
D111	MTZJ9.1B, ZENER		K06009R144520
D112	MTZJ12B, ZENER		K06012R044520
D113	MTZJ11B, ZENER		K06011R044520
D116	BRIDGE DIODE, GBJ2504		K047250400200
D119	1N4004A, DECTIFIER		K040400400520
D121	1N4004A, DECTIFIER		K040400400520
D122	1N4004A, DECTIFIER		K040400400520
D123	1N4004A, DECTIFIER		K040400400520
D124	1N4004A, DECTIFIER		K040400400520
D127	1N4004A, DECTIFIER		K040400400520
D128	1N4004A, DECTIFIER		K040400400520
D134	1SS133T, SWITCHING		K000013300520
D191	1SS133T, SWITCHING		K000013300520
D193	1SS133T, SWITCHING		K000013300520
D501	1SS133T, SWITCHING		K000013300520

NO	DESCRIPTION		PARTS NO
F101	FUSE, 250V-T4A		G650402251160
F102D	FUSE, 250V-T2A		G650202251160
F103	FUSE, 250V-T160MA		G650161251160
F104	FUSE, 250V-T1A		G650102251160
F105	FUSE, 250V-T1A		G650102251160
F106	FUSE, 250V-T1A		G650102251160
F107	FUSE, 250V-T1A		G650102251160
IC101	KA7815/IL7815CV, REG		J126781500020
IC102	KIA7915PI, REG		J126791500030
IC103	KA7805, REG		J126780500270
IC104	KA7805, REG		J126780500270
IC181L	NJM2068DD, OP		J121206800000
IC181R	NJM2068DD, OP		J121206800000
J300	INDUCTOR COIL, 10uH		D330100700520
L101	INDUCTOR COIL, 10uH		D330100700520
Q141	KTA1267Y, PNP		J5001267Y0050
Q142	2SC1740SR, NPN		J5021740S0010
Q143	2SC1740SR, NPN		J5021740S0010
Q145	DTC114TS, NPN		J6020114Y0050
Q181	DTC114TS, NPN		J6020114T0010
Q182	DTA114YS, PNP		J6000114Y0010
Q182	DTC114TS, NPN		J6020114Y0050
Q183L	2SK117Y, FET		J5441170Y0050
Q183R	2SK117Y, FET		J5441170Y0050
R102	CARBON FILM	470-J,1/5W-AX	C00004716P520
R103	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R106	METAL FILM	10-J,2W-AX	C060010066520
R107	CARBON FILM	15K-J,1/5W-AX	C00001536P520
R108	METAL FILM	RES MF 330 1W	C060033165520
R111	METAL FILM	RES MF 3.3 2W	C0603R306(6520
R112	METAL FILM	RES MF 3.3 2W	C0603R306(6520
R113	METAL FILM	RES MF 3.3 2W	C0603R306(6520
R142SL	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R142SR	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R143	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R145	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R146	CARBON FILM	68K-J,1/5W-AX	C00006836P520
R147	CARBON FILM	3.3K-J,1/5W-AX	C00003326P520
R148	CARBON FILM	1.5K-J,1/5W-AX	C00001526P520
R150	METAL FILM	RES MF 10 OHM 1W	C060010065520
R151	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R154	CARBON FILM	560-J,1/5W-AX	C00005616P520
R155	CARBON FILM	560-J,1/5W-AX	C00005616P520
R181	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R183L	CARBON FILM	3.3M-J,1/5W-AX	C00003356P520
R183L	CARBON FILM	3.6K-J,1/5W-AX	C00003626P520
R183R	CARBON FILM	3.3M-J,1/5W-AX	C00003356P520
R183R	CARBON FILM	3.6K-J,1/5W-AX	C00003626P520
R186L	CARBON FILM	100K-J,1/5W-AX	C00001046P520

NO	DESCRIPTION		PARTS NO
R186R	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R187L	CARBON FILM	220K-J,1/5W-AX	C00002246P520
R187R	CARBON FILM	220K-J,1/5W-AX	C00002246P520
R188L	CARBON FILM	8.2K-J,1/5W-AX	C00008226P520
R188R	CARBON FILM	8.2K-J,1/5W-AX	C00008226P520
R190L	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R190R	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R191	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R191	CARBON FILM	220K-J,1/5W-AX	C00002246P520
R191L	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R191R	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R192	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R192L	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R192R	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R193L	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R193R	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R194	CARBON FILM	1.8K-J,1/5W-AX	C00001826P520
R194L	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R194R	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R196	CARBON FILM	220-J,1/5W-AX	C00002216P520
R197	CARBON FILM	220-J,1/5W-AX	C00002216P520
R901	METAL FILM	10-J,2W-AX	C060010066520
R902	METAL FILM	10-J,2W-AX	C060010066520
RLY101	RELAY, DC12V/10A		G680000210000
RLY102	RELAY, DC24V/3A		G680242000000
	HEAT SINK		2120043418020
	HEAT SINK, REG TR		2120043538020
	HEAT SINK, REG TR		2120044308010
	TERMINAL		3790040876010
	FUSE CLIP		G645000050010
	CN,WIRE 1P		L045084006040
	TRANS ST/BY, 230V/50Hz		8201280000010
	SCREW, +2S 3*8 B-TYPE BK/BH		B020030083B10
	ELECT GE 85C	SMH 10000UF 63V M	D040103088000
	AC OUTLET, YKE31-0090		G435040110000
	TER,RCA 2PIN		G601200430040
PCB1-1	**ASSEMBLY P.C.BOARD VCR2**		
C601	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C602	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C603	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C604	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C605	ELECT GE 85C	33UF-M/25V	D040330084050
C606	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C607	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
CN601	CN,WIRE 1P		L046221014580
CN601	CN.WAFER 2.0MM (5P)		L101220050010
R601	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R602	CARBON FILM	1K-J,1/5W-AX	C00001026P520

NO	DESCRIPTION		PARTS NO
R603	CARBON FILM	75-J,1/5W-AX	C00007506P520
PCB1-2	**ASSEMBLY P.C.BOARD SPK SW**		
CP801	CN.WAFER 2.0MM (6P)		L101220060010
LED801	LED, SLR56VCTE7ELEL		K500052101161
LED802	LED, SLR56VCTE7ELEL		K500052101161
SW801	TACT SW, SKHV10920A		G180000270010
SW802	TACT SW, SKHV10920A		G180000270010
PCB2	**ASSEMBLY P.C.BOARD AMP**		**7025HK9902026**
C201C	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C201L	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C201R	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C201SL	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C201SR	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C202C	CERAMIC HIK AXIAL	B330PF-K/50V	D005331277520
C202L	CERAMIC HIK AXIAL	B330PF-K/50V	D005331277520
C202R	CERAMIC HIK AXIAL	B330PF-K/50V	D005331277520
C202SL	CERAMIC HIK AXIAL	B330PF-K/50V	D005331277520
C202SR	CERAMIC HIK AXIAL	B330PF-K/50V	D005331277520
C203C	CERAMIC HIK AXIAL	B0.001UF-K/50V	D005102177530
C203L	CERAMIC HIK AXIAL	B0.001UF-K/50V	D005102177530
C203R	CERAMIC HIK AXIAL	B0.001UF-K/50V	D005102177530
C203SL	CERAMIC HIK AXIAL	B0.001UF-K/50V	D005102177530
C203SR	CERAMIC HIK AXIAL	B0.001UF-K/50V	D005102177530
C204C	ELECT GE 85C	22UF-M/50V	D0402200871 00
C204L	ELECT GE 85C	22UF-M/50V	D0402200871 00
C204R	ELECT GE 85C	22UF-M/50V	D0402200871 00
C204SL	ELECT GE 85C	22UF-M/50V	D0402200871 00
C204SR	ELECT GE 85C	22UF-M/50V	D0402200871 00
C205C	ELECT GE 85C	22UF-M/50V	D0402200871 00
C205L	ELECT GE 85C	22UF-M/50V	D0402200871 00
C205R	ELECT GE 85C	22UF-M/50V	D0402200871 00
C205SL	ELECT GE 85C	22UF-M/50V	D0402200871 00
C205SR	ELECT GE 85C	22UF-M/50V	D0402200871 00
C206C	ELECT GE 85C	220UF-M/10V	D0402210820 50
C206L	ELECT GE 85C	220UF-M/10V	D0402210820 50
C206R	ELECT GE 85C	220UF-M/10V	D0402210820 50
C206SL	ELECT GE 85C	220UF-M/10V	D0402210820 50
C206SR	ELECT GE 85C	220UF-M/10V	D0402210820 50
C209C	ELECT GE 85C	10UF-M/50V	D0401000870 50
C209L	ELECT GE 85C	10UF-M/50V	D0401000870 50
C209R	ELECT GE 85C	10UF-M/50V	D0401000870 50
C209SL	ELECT GE 85C	10UF-M/50V	D0401000870 50
C209SR	ELECT GE 85C	10UF-M/50V	D0401000870 50
C210C	ELECT GE 85C	47UF-M/100V	D0404700801 30
C210L	ELECT GE 85C	47UF-M/100V	D0404700801 30
C210R	ELECT GE 85C	47UF-M/100V	D0404700801 30
C210SL	ELECT GE 85C	47UF-M/100V	D0404700801 30

NO	DESCRIPTION		PARTS NO
C210SR	ELECT GE 85C	47UF-M/100V	D04047008C130
C211C	ELECT GE 85C	47UF-M/100V	D04047008C130
C211L	ELECT GE 85C	47UF-M/100V	D04047008C130
C211R	ELECT GE 85C	47UF-M/100V	D04047008C130
C211SL	ELECT GE 85C	47UF-M/100V	D04047008C130
C211SR	ELECT GE 85C	47UF-M/100V	D04047008C130
C212C	ELECT GE 85C	10UF-M/50V	D040100087050
C212L	ELECT GE 85C	10UF-M/50V	D040100087050
C212R	ELECT GE 85C	10UF-M/50V	D040100087050
C212SL	ELECT GE 85C	10UF-M/50V	D040100087050
C212SR	ELECT GE 85C	10UF-M/50V	D040100087050
C214C	CERAMIC T.C AXIAL	SL1PF-K/50V	D001010077530
C214L	CERAMIC T.C AXIAL	SL1PF-K/50V	D001010077530
C214R	CERAMIC T.C AXIAL	SL1PF-K/50V	D001010077530
C214SL	CERAMIC T.C AXIAL	SL1PF-K/50V	D001010077530
C214SR	CERAMIC T.C AXIAL	SL1PF-K/50V	D001010077530
C215C	CERAMIC HIK AXIAL	B180PF-K/50V	D005181177520
C215L	CERAMIC HIK AXIAL	B180PF-K/50V	D005181177520
C215R	CERAMIC HIK AXIAL	B180PF-K/50V	D005181177520
C215SL	CERAMIC HIK AXIAL	B180PF-K/50V	D005181177520
C215SR	CERAMIC HIK AXIAL	B180PF-K/50V	D005181177520
CN201	CN.WAFER 2.0MM (10P)		L101220100000
D201C	1SS133T, SWITCHING		K000013300520
D201L	1SS133T, SWITCHING		K000013300520
D201R	1SS133T, SWITCHING		K000013300520
D201SL	1SS133T, SWITCHING		K000013300520
D201SR	1SS133T, SWITCHING		K000013300520
D202C	1SS133T, SWITCHING		K000013300520
D202L	1SS133T, SWITCHING		K000013300520
D202R	1SS133T, SWITCHING		K000013300520
D202SL	1SS133T, SWITCHING		K000013300520
D202SR	1SS133T, SWITCHING		K000013300520
L201C	INDUCTOR COIL, J9000031		D330900001320
L201L	INDUCTOR COIL, J9000031		D330900001320
L201R	INDUCTOR COIL, J9000031		D330900001320
Q201C	KSA992F, PNP		J5000992F0050
Q201L	KSA992F, PNP		J5000992F0050
Q201R	KSA992F, PNP		J5000992F0050
Q201SL	KSA992F, PNP		J5000992F0050
Q201SR	KSA992F, PNP		J5000992F0050
Q202C	KSA992F, PNP		J5000992F0050
Q202L	KSA992F, PNP		J5000992F0050
Q202R	KSA992F, PNP		J5000992F0050
Q202SL	KSA992F, PNP		J5000992F0050
Q202SR	KSA992F, PNP		J5000992F0050
Q203C	KSA992F, PNP		J5000992F0050
Q203L	KSA992F, PNP		J5000992F0050
Q203R	KSA992F, PNP		J5000992F0050
Q203SL	KSA992F, PNP		J5000992F0050

NO	DESCRIPTION		PARTS NO
Q203SR	KSA992F, PNP		J5000992F0050
Q204C	KSA992F, PNP		J5000992F0050
Q204L	KSA992F, PNP		J5000992F0050
Q204R	KSA992F, PNP		J5000992F0050
Q204SL	KSA992F, PNP		J5000992F0050
Q204SR	KSA992F, PNP		J5000992F0050
Q205C	KSC1845F, NPN		J5021845F0000
Q205L	KSC1845F, NPN		J5021845F0000
Q205R	KSC1845F, NPN		J5021845F0000
Q205SL	KSC1845F, NPN		J5021845F0000
Q205SR	KSC1845F, NPN		J5021845F0000
Q206C	KSC1845F, NPN		J5021845F0000
Q206L	KSC1845F, NPN		J5021845F0000
Q206R	KSC1845F, NPN		J5021845F0000
Q206SL	KSC1845F, NPN		J5021845F0000
Q206SR	KSC1845F, NPN		J5021845F0000
Q207C	KSA992F, PNP		J5000992F0050
Q207L	KSA992F, PNP		J5000992F0050
Q207R	KSA992F, PNP		J5000992F0050
Q207SL	KSA992F, PNP		J5000992F0050
Q207SR	KSA992F, PNP		J5000992F0050
Q208C	KTA1024Y, PNP		J5001024Y0050
Q208L	KTA1024Y, PNP		J5001024Y0050
Q208R	KTA1024Y, PNP		J5001024Y0050
Q208SL	KTA1024Y, PNP		J5001024Y0050
Q208SR	KTA1024Y, PNP		J5001024Y0050
Q209C	KTC3206Y, NPN		J5023206Y0050
Q209L	KTC3206Y, NPN		J5023206Y0050
Q209R	KTC3206Y, NPN		J5023206Y0050
Q209SL	KTC3206Y, NPN		J5023206Y0050
Q209SR	KTC3206Y, NPN		J5023206Y0050
Q215C	KSC1845F, NPN		J5021845F0000
Q215L	KSC1845F, NPN		J5021845F0000
Q215R	KSC1845F, NPN		J5021845F0000
Q215SL	KSC1845F, NPN		J5021845F0000
Q215SR	KSC1845F, NPN		J5021845F0000
R201C	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R201L	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R201R	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R201SL	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R201SR	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R202C	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R202L	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R202R	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R202SL	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R202SR	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R203C	CARBON FILM	15-J,1/5W-AX	C00001506P520
R203L	CARBON FILM	15-J,1/5W-AX	C00001506P520
R203R	CARBON FILM	15-J,1/5W-AX	C00001506P520

NO		DESCRIPTION	PARTS NO
R203SL	CARBON FILM	15-J,1/5W-AX	C00001506P520
R203SR	CARBON FILM	15-J,1/5W-AX	C00001506P520
R204C	CARBON FILM	15-J,1/5W-AX	C00001506P520
R204L	CARBON FILM	15-J,1/5W-AX	C00001506P520
R204R	CARBON FILM	15-J,1/5W-AX	C00001506P520
R204SL	CARBON FILM	15-J,1/5W-AX	C00001506P520
R204SR	CARBON FILM	15-J,1/5W-AX	C00001506P520
R205C	CARBON FILM	750-J,1/5W-AX	C00007516P520
R205L	CARBON FILM	750-J,1/5W-AX	C00007516P520
R205R	CARBON FILM	750-J,1/5W-AX	C00007516P520
R205SL	CARBON FILM	750-J,1/5W-AX	C00007516P520
R205SR	CARBON FILM	750-J,1/5W-AX	C00007516P520
R206C	CARBON FILM	750-J,1/5W-AX	C00007516P520
R206L	CARBON FILM	750-J,1/5W-AX	C00007516P520
R206R	CARBON FILM	750-J,1/5W-AX	C00007516P520
R206SL	CARBON FILM	750-J,1/5W-AX	C00007516P520
R206SR	CARBON FILM	750-J,1/5W-AX	C00007516P520
R207C	CARBON FILM	470-J,1/5W-AX	C00004716P520
R207L	CARBON FILM	470-J,1/5W-AX	C00004716P520
R207R	CARBON FILM	470-J,1/5W-AX	C00004716P520
R207SL	CARBON FILM	470-J,1/5W-AX	C00004716P520
R207SR	CARBON FILM	470-J,1/5W-AX	C00004716P520
R208C	CARBON FILM	68-J,1/5W-AX	C00006806P520
R208L	CARBON FILM	68-J,1/5W-AX	C00006806P520
R208R	CARBON FILM	68-J,1/5W-AX	C00006806P520
R208SL	CARBON FILM	68-J,1/5W-AX	C00006806P520
R208SR	CARBON FILM	68-J,1/5W-AX	C00006806P520
R209C	CARBON FILM	150-J,1/5W-AX	C00001516P520
R209L	CARBON FILM	150-J,1/5W-AX	C00001516P520
R209R	CARBON FILM	150-J,1/5W-AX	C00001516P520
R209SL	CARBON FILM	150-J,1/5W-AX	C00001516P520
R209SR	CARBON FILM	150-J,1/5W-AX	C00001516P520
R210C	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R210L	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R210R	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R210SL	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R210SR	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R211C	CARBON FILM	43K-J,1/5W-AX	C00004336P520
R211L	CARBON FILM	43K-J,1/5W-AX	C00004336P520
R211R	CARBON FILM	43K-J,1/5W-AX	C00004336P520
R211SL	CARBON FILM	43K-J,1/5W-AX	C00004336P520
R211SR	CARBON FILM	43K-J,1/5W-AX	C00004336P520
R212C	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R212L	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R212R	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R212SL	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R212SR	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R213C	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R213L	CARBON FILM	33K-J,1/5W-AX	C00003336P520

NO	DESCRIPTION		PARTS NO
R213R	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R213SL	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R213SR	CARBON FILM	33K-J,1/5W-AX	C00003336P520
R214C	CARBON FILM	560-J,1/5W-AX	C00005616P520
R214L	CARBON FILM	560-J,1/5W-AX	C00005616P520
R214R	CARBON FILM	560-J,1/5W-AX	C00005616P520
R214SL	CARBON FILM	560-J,1/5W-AX	C00005616P520
R214SR	CARBON FILM	560-J,1/5W-AX	C00005616P520
R216C	CARBON FILM	560-J,1/5W-AX	C00005616P520
R216L	CARBON FILM	560-J,1/5W-AX	C00005616P520
R216R	CARBON FILM	560-J,1/5W-AX	C00005616P520
R216SL	CARBON FILM	560-J,1/5W-AX	C00005616P520
R216SR	CARBON FILM	560-J,1/5W-AX	C00005616P520
R217C	CARBON FILM	560-J,1/5W-AX	C00005616P520
R217L	CARBON FILM	560-J,1/5W-AX	C00005616P520
R217R	CARBON FILM	560-J,1/5W-AX	C00005616P520
R217SL	CARBON FILM	560-J,1/5W-AX	C00005616P520
R217SR	CARBON FILM	560-J,1/5W-AX	C00005616P520
R218C	CARBON FILM	560-J,1/5W-AX	C00005616P520
R218L	CARBON FILM	560-J,1/5W-AX	C00005616P520
R218R	CARBON FILM	560-J,1/5W-AX	C00005616P520
R218SL	CARBON FILM	560-J,1/5W-AX	C00005616P520
R218SR	CARBON FILM	560-J,1/5W-AX	C00005616P520
R219C	CARBON FILM	560-J,1/5W-AX	C00005616P520
R219L	CARBON FILM	560-J,1/5W-AX	C00005616P520
R219R	CARBON FILM	560-J,1/5W-AX	C00005616P520
R219SL	CARBON FILM	560-J,1/5W-AX	C00005616P520
R219SR	CARBON FILM	560-J,1/5W-AX	C00005616P520
R220C	CARBON FILM	560-J,1/5W-AX	C00005616P520
R220L	CARBON FILM	560-J,1/5W-AX	C00005616P520
R220R	CARBON FILM	560-J,1/5W-AX	C00005616P520
R220SL	CARBON FILM	560-J,1/5W-AX	C00005616P520
R220SR	CARBON FILM	560-J,1/5W-AX	C00005616P520
R221C	CARBON FILM	82-J,1/5W-AX	C00008206P520
R221L	CARBON FILM	82-J,1/5W-AX	C00008206P520
R221R	CARBON FILM	82-J,1/5W-AX	C00008206P520
R221SL	CARBON FILM	82-J,1/5W-AX	C00008206P520
R221SR	CARBON FILM	82-J,1/5W-AX	C00008206P520
R222C	CARBON FILM	82-J,1/5W-AX	C00008206P520
R222L	CARBON FILM	82-J,1/5W-AX	C00008206P520
R222R	CARBON FILM	82-J,1/5W-AX	C00008206P520
R222SL	CARBON FILM	82-J,1/5W-AX	C00008206P520
R222SR	CARBON FILM	82-J,1/5W-AX	C00008206P520
R223C	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R223L	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R223R	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R223SL	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R223SR	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R224C	CARBON FILM	22K-J,1/5W-AX	C00002236P520

NO		DESCRIPTION	PARTS NO
R224L	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R224R	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R224SL	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R224SR	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R228C	METAL FILM	220-J,1/4W	C060022163050
R228L	METAL FILM	220-J,1/4W	C060022163050
R228R	METAL FILM	220-J,1/4W	C060022163050
R228SL	METAL FILM	220-J,1/4W	C060022163050
R228SR	METAL FILM	220-J,1/4W	C060022163050
R229C	METAL FILM	220-J,1/4W	C060022163050
R229L	METAL FILM	220-J,1/4W	C060022163050
R229R	METAL FILM	220-J,1/4W	C060022163050
R229SL	METAL FILM	220-J,1/4W	C060022163050
R229SR	METAL FILM	220-J,1/4W	C060022163050
R230C	CARBON FILM	22-J,1/5W-AX	C00002206P520
R230L	CARBON FILM	22-J,1/5W-AX	C00002206P520
R230R	CARBON FILM	22-J,1/5W-AX	C00002206P520
R230SL	CARBON FILM	22-J,1/5W-AX	C00002206P520
R230SR	CARBON FILM	22-J,1/5W-AX	C00002206P520
R231C	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R231L	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R231R	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R231SL	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R231SR	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R232C	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R232L	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R232R	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R232SL	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R232SR	CARBON FILM	4.7-J,1/5W-AX	C0004R706P520
R233C	CARBON FILM	1.8K-J,1/5W-AX	C00001826P520
R233L	CARBON FILM	1.8K-J,1/5W-AX	C00001826P520
R233R	CARBON FILM	1.8K-J,1/5W-AX	C00001826P520
R233SL	CARBON FILM	1.8K-J,1/5W-AX	C00001826P520
R233SR	CARBON FILM	1.8K-J,1/5W-AX	C00001826P520
R234C	CARBON FILM	2K-J,1/5W-AX	C00002026P520
R234L	CARBON FILM	2K-J,1/5W-AX	C00002026P520
R234R	CARBON FILM	2K-J,1/5W-AX	C00002026P520
R234SL	CARBON FILM	2K-J,1/5W-AX	C00002026P520
R234SR	CARBON FILM	2K-J,1/5W-AX	C00002026P520
R235C	CARBON FILM	910-J,1/5W-AX	C00009116P520
R235L	CARBON FILM	910-J,1/5W-AX	C00009116P520
R235R	CARBON FILM	910-J,1/5W-AX	C00009116P520
R235SL	CARBON FILM	910-J,1/5W-AX	C00009116P520
R235SR	CARBON FILM	910-J,1/5W-AX	C00009116P520
R236C	CARBON FILM	6.8K-J,1/5W-AX	C00006826P520
R236L	CARBON FILM	6.8K-J,1/5W-AX	C00006826P520
R236R	CARBON FILM	6.8K-J,1/5W-AX	C00006826P520
R236SL	CARBON FILM	6.8K-J,1/5W-AX	C00006826P520
R236SR	CARBON FILM	6.8K-J,1/5W-AX	C00006826P520

NO	DESCRIPTION		PARTS NO
R237C	CARBON FILM	39-J,1/5W-AX	C00003906P520
R237L	CARBON FILM	39-J,1/5W-AX	C00003906P520
R237R	CARBON FILM	39-J,1/5W-AX	C00003906P520
R238C	CARBON FILM	39-J,1/5W-AX	C00003906P520
R238L	CARBON FILM	39-J,1/5W-AX	C00003906P520
R238R	CARBON FILM	39-J,1/5W-AX	C00003906P520
R239C	CARBON FILM	39-J,1/5W-AX	C00003906P520
R239L	CARBON FILM	39-J,1/5W-AX	C00003906P520
R239R	CARBON FILM	39-J,1/5W-AX	C00003906P520
R240C	CARBON FILM	39-J,1/5W-AX	C00003906P520
R240L	CARBON FILM	39-J,1/5W-AX	C00003906P520
R240R	CARBON FILM	39-J,1/5W-AX	C00003906P520
R245L	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R245R	CARBON FILM	22K-J,1/5W-AX	C00002236P520
	CN,WIRE 1P		L045084006040
	CN,WIRE 9P		L000800090010
	CN,WIRE 10P		L000800100010
PCB3	**ASSEMBLY P.C.BOARD FRONT**		**7025HK9902020**
C301	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C304	ELECT GE 85C	47UF-M/16V	D040470083100
C305	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C307	DOUBLE LAYER(70)	H0.047F-70UA/5.5V	D090473904010
C308	ELECT GE 85C	4.7UF-M/50V	D0404R7087080
C309	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C310	FILM POLYESTER	ST-0.047UF-J/100V	D02047306C060
C311	CERAMIC HIK AXIAL	B820PF-K/50V	D005821287520
C312	CERAMIC HIK AXIAL	B820PF-K/50V	D005821287520
C313	ELECT GE 85C	47UF-M/16V	D040470083100
C314	ELECT GE 85C	0.1UF-M/50V	D040R10087070
CP301	CN.FPC 1.25MM (29P)		L131525752900
D301	1SS133T, SWITCHING		K000013300520
D302	1SS133T, SWITCHING		K000013300520
D303	1SS133T, SWITCHING		K000013300520
D304	1SS133T, SWITCHING		K000013300520
D305	1SS133T, SWITCHING		K000013300520
D306	1SS133T, SWITCHING		K000013300520
D307	1SS133T, SWITCHING		K000013300520
D308	1SS133T, SWITCHING		K000013300520
D309	1SS133T, SWITCHING		K000013300520
D310	1SS133T, SWITCHING		K000013300520
D311	1SS133T, SWITCHING		K000013300520
D312	1SS133T, SWITCHING		K000013300520
D313	1SS133T, SWITCHING		K000013300520
D314	1SS133T, SWITCHING		K000013300520
D315	1SS133T, SWITCHING		K000013300520
D316	1SS133T, SWITCHING		K000013300520
D317	1SS133T, SWITCHING		K000013300520
D318	1SS133T, SWITCHING		K000013300520

NO	DESCRIPTION		PARTS NO
D319	1SS133T, SWITCHING		K000013300520
D320	1SS133T, SWITCHING		K000013300520
D399	1SS133T, SWITCHING		K000013300520
FIP301	DISPLAY, CM1477C		K530000360010
IC301	CXP82852-152Q, CPU		J020828521520
LED301	LED, SLR56VCTE7ELEL		K500052101161
LED302	LED, SLR56VCTE7ELEL		K500052101161
LED303	LED, SLR56VCTE7ELEL		K500052101161
LED304	LED, SLR56VCTE7ELEL		K500052101161
LED305	LED, SLR342PGTE7EL		K500035110001
LED306	LED, SLR342PGTE7EL		K500035110001
LED309F	LED, SLR56VCTE7ELEL		K500052101161
LED310	LED, SLR56VCTE7ELEL		K500052101161
LED311	LED, SLR56VCTE7ELEL		K500052101161
Q301-Q309	DTC114TS, NPN		J6020114T0010
Q310F	DTC114TS, NPN		J6020114T0010
Q312	DTC114TS, NPN		J6020114T0010
Q313	DTC114TS, NPN		J6020114T0010
Q314	DTC114TS, NPN		J6020114T0010
Q315	DTC114TS, NPN		J6020114Y0050
Q321	DTC114TS, NPN		J6020114T0010
R303	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R304	CARBON FILM	4.7K-J,1/5W-AX	C00004726P520
R304	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R305-R316	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R317	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R318	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R318	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R320	CARBON FILM	4.7K-J,1/5W-AX	C00004726P520
R321	CARBON FILM	4.7K-J,1/5W-AX	C00004726P520
R322	CARBON FILM	220-J,1/5W-AX	C00002216P520
R323	CARBON FILM	820-J,1/5W-AX	C00008216P520
R324	CARBON FILM	820-J,1/5W-AX	C00008216P520
R325F	CARBON FILM	820-J,1/5W-AX	C00008216P520
R326	CARBON FILM	820-J,1/5W-AX	C00008216P520
R327	CARBON FILM	820-J,1/5W-AX	C00008216P520
R328	CARBON FILM	820-J,1/5W-AX	C00008216P520
R329	CARBON FILM	820-J,1/5W-AX	C00008216P520
R330	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R333	CARBON FILM	470K-J,1/5W-AX	C00004746P520
R334	CARBON FILM	220-J,1/5W-AX	C00002216P520
R335	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R336	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R337	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R338	CARBON FILM	68K-J,1/5W-AX	C00006836P520
R339	CARBON FILM	68K-J,1/5W-AX	C00006836P520
R340	CARBON FILM	820-J,1/5W-AX	C00008216P520
R341	CARBON FILM	820-J,1/5W-AX	C00008216P520
R344	CARBON FILM	47-J,1/5W-AX	C00004706P520

NO	DESCRIPTION		PARTS NO
R345-R350	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R354	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R997	CARBON FILM	51K-J,1/5W-AX	C00005136P520
SW301-SW324	TACT SW, SKHV10920A		G180000270010
SW327-SW332	TACT SW, EVQPJJ05T/260G		G180040560010
VR301	ENCODER SW, EC16B24304		G121162430400
XTAL301	RESONATOR, CST10.0MTW		E830100000050
	FL HOLDER		432004078101A
	CN,WIRE 1P		L045084006040
	REMOCON MODULE, CRV1M342		E940342210010
	CN,WIRE 10P		L000401100010
	CN,WIRE 6P		L000800060020
PCB3-1	**ASSEMBLY P.C.BOARD PHONE**		
1	CN,WIRE 4P		L000351040030
C302	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C701D	CERAMIC HIK AXIAL	B560PF-K/50V	D005561277520
C702D	CERAMIC HIK AXIAL	B560PF-K/50V	D005561277520
JACK301	JACK,D6.5		G402040161330
R701D	CARBON FILM	15K-J,1/5W-AX	C00001536P520
R702D	CARBON FILM	15K-J,1/5W-AX	C00001536P520
R703	METAL FILM	470-J,2W-AX	C060047166520
R704	METAL FILM	470-J,2W-AX	C060047166520
	BKT SHIELD		3070045816010
PCB3-2	**ASSEMBLY P.C.BOARD POWER SW**		
SW335	PUSH SW, SDDL-005-S		G000122006030
	CN,WIRE 2P		L005010200010
PCB4	**ASSEMBLY P.C.BOARD INPUT**		**7025HK990222**
C401LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C401RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C402LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C402RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C403LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C403RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C404LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C404RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C405LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C405RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C406LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C406RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C407LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C407RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C408LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C408RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C409LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C409RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C410LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520

NO	DESCRIPTION		PARTS NO
C410RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C411LD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C411RD	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C412	ELECT GE 85C	47UF-M/16V	D040470083100
C413	ELECT GE 85C	47UF-M/16V	D040470083100
C414	ELECT GE 85C	470UF-M/10V	D040471082060
C415	ELECT GE 85C	470UF-M/10V	D040471082060
C417	ELECT GE 85C	47UF-M/25V	D040470084100
C418	ELECT GE 85C	47UF-M/25V	D040470084100
C419	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C420	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C421	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C422	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C423	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C424	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C425	ELECT GE 85C	47UF-M/16V	D040470083100
C426	ELECT GE 85C	47UF-M/16V	D040470083100
C427	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
C428	ELECT GE 85C	100UF-M/16V	D040101083100
C499	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C500	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
CN401	CN.WAFER 2.0MM (11P)		L101352371110
CN402	CN.WAFER 2.0MM (10P)		L101352371010
D401	1SS133T, SWITCHING		K000013300520
IC401	TC9273N, ANALOG		J080927300000
IC402	KIA75559P (KIA4559P), OP		J121455900010
IC403	LA7952, VIDEO S/W		J171795200000
Q401	2SC3199Y (BKTC3199), NPN		J5023199Y005O
Q402	2SC3199Y (BKTC3199), NPN		J5023199Y005O
Q403	DTC114TS, NPN		J6020114Y005O
Q404	DTC114TS, NPN		J6020114Y005O
R401L	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R401R	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R402L	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R402R	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R403L	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R403R	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R404L	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R404R	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R405L	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R405R	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R406L	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R406R	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R407L	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R407R	CARBON FILM	1K-J,1/5W-AX	C00001026P52O
R408	CARBON FILM	75-J,1/5W-AX	C00007506P52O
R409	CARBON FILM	75-J,1/5W-AX	C00007506P52O
R410	CARBON FILM	68-J,1/5W-AX	C00006806P52O
R411	CARBON FILM	47K-J,1/5W-AX	C00004736P52O

NO	DESCRIPTION		PARTS NO
R412	CARBON FILM	390-J,1/5W-AX	C00003916P520
R413	CARBON FILM	68-J,1/5W-AX	C00006806P520
R414	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R415	CARBON FILM	390-J,1/5W-AX	C00003916P520
R417	CARBON FILM	3.3K-J,1/5W-AX	C00003326P520
R418	CARBON FILM	100-J,1/5W	C00001016P520
R419	CARBON FILM	100-J,1/5W	C00001016P520
R420	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R421	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R422	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R423	CARBON FILM	100-J,1/5W	C00001016P520
R424	CARBON FILM	470-J,1/5W-AX	C00004716P520
R425	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R426	CARBON FILM	470-J,1/5W-AX	C00004716P520
R427	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R428	CARBON FILM	470-J,1/5W-AX	C00004716P520
R429	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R430	CARBON FILM	100-J,1/5W	C00001016P520
R431	CARBON FILM	470-J,1/5W-AX	C00004716P520
R432	CARBON FILM	100K-J,1/5W-AX	C00001046P520
R433	CARBON FILM	75-J,1/5W-AX	C00007506P520
ZD401	MTZJ12B, ZENER		K06012R044520
	CN,WIRE 1P		L045084006040
	TER,RCA 2PIN		G601200900010
	TER,RCA 4PIN		G602040045000
	TER,RCA 3PIN		G606300390010
	TER,RCA 9PIN		G607901220060
PCB5	**ASSEMBLY P.C.BOARD PROCESSOR**		**7025HK9902023**
C100	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C501	ELECT GE 85C	47UF-M/35V	D040470085100
C501C	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C501FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C501FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C501SL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C501SR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C501W	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C502	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C502C	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C502FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C502FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C502SL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C502SR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C502W	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C503	ELECT GE 85C	47UF-M/35V	D040470085100
C503C	CERAMIC CHIP HIK	X7R1200PF-K/50V	D011122177210
C503FL	CERAMIC CHIP HIK	X7R1200PF-K/50V	D011122177210
C503FR	CERAMIC CHIP HIK	X7R1200PF-K/50V	D011122177210
C504	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200

NO	DESCRIPTION		PARTS NO
C504C	CERAMIC CHIP HIK	X7R1200PF-K/50V	D011122177210
C504FL	CERAMIC CHIP HIK	X7R1200PF-K/50V	D011122177210
C504FR	CERAMIC CHIP HIK	X7R1200PF-K/50V	D011122177210
C505	ELECT GE 85C	100UF-M/16V	D040101083100
C505C	CERAMIC CHIP HIK	X7R0.018UF-K/50V	D011183777200
C505FL	CERAMIC CHIP HIK	X7R0.018UF-K/50V	D011183777200
C505FR	CERAMIC CHIP HIK	X7R0.018UF-K/50V	D011183777200
C506	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C506C	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C506FL	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C506FR	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C507	ELECT GE 85C	100UF-M/16V	D040101083100
C507C	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C507FL	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C507FR	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C507SL	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C507SR	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C507W	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C508	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C508C	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C508FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C508FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C508SL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C508SR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C508W	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C509	ELECT GE 85C	100UF-M/16V	D040101083100
C509C	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C509FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C509FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C509SL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C509SR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C510	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C510C	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C510FL	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C510FR	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C510SL	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C510SR	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C510W	ELECT GE 85C	4.7UF-M/16V	D0404R7083020
C511	ELECT GE 85C	100UF-M/16V	D040101083100
C511C	CERAMIC CHIP T.C	COG330PF-J/50V	D010331167200
C511FL	CERAMIC CHIP T.C	COG330PF-J/50V	D010331167200
C511FR	CERAMIC CHIP T.C	COG330PF-J/50V	D010331167200
C511SL	CERAMIC CHIP T.C	COG330PF-J/50V	D010331167200
C511SR	CERAMIC CHIP T.C	COG330PF-J/50V	D010331167200
C511W	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C512	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C512FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C512FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C513	ELECT GE 85C	100UF-M/16V	D040101083100

NO	DESCRIPTION		PARTS NO
C513FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C513FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C514	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C514FL	ELECT GE 85C	10UF-M/16V	D040100083020
C514FR	ELECT GE 85C	10UF-M/16V	D040100083020
C515	ELECT GE 85C	100UF-M/16V	D040101083100
C515FL	CERAMIC CHIP HIK	Y5V0.056UF-Z/50V	D011563597200
C515FR	CERAMIC CHIP HIK	Y5V0.056UF-Z/50V	D011563597200
C516	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C516FL	CERAMIC CHIP HIK	X7R0.01UF-K/50V	D011103177210
C516FR	CERAMIC CHIP HIK	X7R0.01UF-K/50V	D011103177210
C517	ELECT GE 85C	100UF-M/16V	D040101083100
C517FL	ELECT GE 85C	10UF-M/16V	D040100083020
C517FR	ELECT GE 85C	10UF-M/16V	D040100083020
C518	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C518FL	CERAMIC CHIP HIK	X7R3300PF-K/50V	D011332177210
C518FR	CERAMIC CHIP HIK	X7R3300PF-K/50V	D011332177210
C519	ELECT GE 85C	100UF-M/16V	D040101083100
C519FL	CERAMIC CHIP HIK	X7R0.022UF-K/50V	D011223177210
C519FR	CERAMIC CHIP HIK	X7R0.022UF-K/50V	D011223177210
C520	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C520FL	CERAMIC CHIP HIK	X7R1500PF-K/50V	D011152177210
C520FR	CERAMIC CHIP HIK	X7R1500PF-K/50V	D011152177210
C521C	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C521FL	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C521FR	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C521SL	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C521SR	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C521W	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C522C	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C522FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C522FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C522SL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C522SR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C522W	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C523W	CERAMIC CHIP HIK	X7R1200PF-K/50V	D011122177210
C524C	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C524FL	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C524FR	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C524SL	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C524SR	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C524W	ELECT GE 85C	4.7UF-M/16V	D0404R7083O20
C525C	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C525FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C525FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C525SL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C525SR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
C525W	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C999	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200

NO	DESCRIPTION		PARTS NO
CN501	CN.WAFER 2.0MM (15P)		L101352371510
CN502	CN.WAFER 2.0MM (16P)		L101352371610
F504C	CHIP THICK	6.8K-J,1/10W	C200068260200
IC501	KIC9459F, ELECT VR		J084945900010
IC502	KIC9459F, ELECT VR		J084945900010
IC503	KIC9459F, ELECT VR		J084945900010
IC504	TC9184AP, ANALOG		J080918400010
IC505	KIC9162AN, LOGIC		J040916200020
IC506-IC514	NJM4560M, OP		J121456000050
IC515	KIC9163AN, LOGIC		J040916300020
Q501C	DTC323TK, NPN		J502323000050
Q501FL	DTC323TK, NPN		J502323000050
Q501FR	DTC323TK, NPN		J502323000050
Q501SL	DTC323TK, NPN		J502323000050
Q501SR	DTC323TK, NPN		J502323000050
Q501W	DTC323TK, NPN		J502323000050
Q502C	DTA114YK, PNP		J5200114Y0210
Q502FL	DTA114YK, PNP		J5200114Y0210
Q502SL	DTA114YK, PNP		J5200114Y0210
Q502W	DTA114YK, PNP		J5200114Y0210
Q503C	DTC114YK, NPN		J5220114Y0210
Q503FL	DTC114YK, NPN		J5220114Y0210
Q503SL	DTC114YK, NPN		J5220114Y0210
Q503W	DTC114YK, NPN		J5220114Y0210
R501	CHIP THICK	100-J,1/10W	C200010160200
R501C	CHIP THICK	1K-J,1/10W	C200010260200
R501FL	CHIP THICK	820-J,1/10W	C200082160200
R501FR	CHIP THICK	820-J,1/10W	C200082160200
R501SL	CHIP THICK	1K-J,1/10W	C200010260200
R501SR	CHIP THICK	1K-J,1/10W	C200010260200
R501W	CHIP THICK	3K-J,1/10W	C200030260200
R502	CHIP THICK	100-J,1/10W	C200010160200
R502C	CHIP THICK	2.2K-J,1/10W	C200022260200
R502FL	CHIP THICK	2.2K-J,1/10W	C200022260200
R502FR	CHIP THICK	2.2K-J,1/10W	C200022260200
R503	CARBON FILM	100-J,1/5W	C00001016P520
R503C	CHIP THICK	10K-J,1/10W	C200010360200
R503FL	CHIP THICK	10K-J,1/10W	C200010360200
R503FR	CHIP THICK	10K-J,1/10W	C200010360200
R504	CARBON FILM	100-J,1/5W	C00001016P520
R504FL	CHIP THICK	6.8K-J,1/10W	C200068260200
R504FR	CHIP THICK	6.8K-J,1/10W	C200068260200
R505	CARBON FILM	22-J,1/5W-AX	C00002206P520
R505C	CHIP THICK	18K-J,1/10W	C200018360200
R505FL	CHIP THICK	18K-J,1/10W	C200018360200
R505FR	CHIP THICK	18K-J,1/10W	C200018360200
R506	CARBON FILM	22-J,1/5W-AX	C00002206P520
R506C	CHIP THICK	470-J,1/10W	C200047160200
R506FL	CHIP THICK	470-J,1/10W	C200047160200

NO		DESCRIPTION	PARTS NO
R506FR	CHIP THICK	470-J,1/10W	C200047160200
R507	CHIP THICK	22-J,1/10W	C200022060200
R507C	CHIP THICK	100K-J,1/10W	C200010460200
R507FL	CHIP THICK	100K-J,1/10W	C200010460200
R507FR	CHIP THICK	100K-J,1/10W	C200010460200
R508	CHIP THICK	22-J,1/10W	C200022060200
R508C	CHIP THICK	100K-J,1/10W	C200010460200
R508FL	CHIP THICK	100K-J,1/10W	C200010460200
R508FR	CHIP THICK	100K-J,1/10W	C200010460200
R508SL	CHIP THICK	100K-J,1/10W	C200010460200
R508SR	CHIP THICK	100K-J,1/10W	C200010460200
R508W	CHIP THICK	100K-J,1/10W	C200010460200
R509	CHIP THICK	12K-J,1/10W	C200012360200
R509C	CHIP THICK	4.7K-J,1/10W	C200047260200
R509FL	CHIP THICK	1.2K-J,1/10W	C200012260200
R509FR	CHIP THICK	1.2K-J,1/10W	C200012260200
R509SL	CHIP THICK	4.7K-J,1/10W	C200047260200
R509SR	CHIP THICK	4.7K-J,1/10W	C200047260200
R510	CHIP THICK	22-J,1/10W	C200022060200
R510C	CHIP THICK	2.4K-J,1/10W	C200024260200
R510FL	CHIP THICK	2.4K-J,1/10W	C200024260200
R510FR	CHIP THICK	2.4K-J,1/10W	C200024260200
R510SL	CHIP THICK	2.4K-J,1/10W	C200024260200
R510SR	CHIP THICK	2.4K-J,1/10W	C200024260200
R511C	CHIP THICK	470-J,1/10W	C200047160200
R511FL	CHIP THICK	470-J,1/10W	C200047160200
R511FR	CHIP THICK	470-J,1/10W	C200047160200
R511SL	CHIP THICK	470-J,1/10W	C200047160200
R511SR	CHIP THICK	470-J,1/10W	C200047160200
R511W	CHIP THICK	470-J,1/10W	C200047160200
R512C	CHIP THICK	100K-J,1/10W	C200010460200
R512FL	CHIP THICK	100K-J,1/10W	C200010460200
R512FR	CHIP THICK	100K-J,1/10W	C200010460200
R512SL	CHIP THICK	100K-J,1/10W	C200010460200
R512SR	CHIP THICK	100K-J,1/10W	C200010460200
R512W	CHIP THICK	100K-J,1/10W	C200010460200
R513FL	CHIP THICK	10K-J,1/10W	C200010360200
R513FR	CHIP THICK	10K-J,1/10W	C200010360200
R514FL	CHIP THICK	2.4K-J,1/10W	C200024260200
R514FR	CHIP THICK	2.4K-J,1/10W	C200024260200
R515FL	CHIP THICK	1M-J,1/10W	C200010560200
R515FR	CHIP THICK	1M-J,1/10W	C200010560200
R516FL	CHIP THICK	47K-J,1/10W	C200047360200
R516FR	CHIP THICK	47K-J,1/10W	C200047360200
R517FL	CHIP THICK	3.3K-J,1/10W	C200033260200
R517FR	CHIP THICK	3.3K-J,1/10W	C200033260200
R518FL	CHIP THICK	33K-J,1/10W	C200033360200
R518FR	CHIP THICK	33K-J,1/10W	C200033360200
R519FL	CHIP THICK	220K-J,1/10W	C200022460200

NO	DESCRIPTION		PARTS NO
R519FR	CHIP THICK	220K-J,1/10W	C200022460200
R520FL	CHIP THICK	22K-J,1/10W	C200022360200
R520FR	CARBON FILM	22K-J,1/5W-AX	C00002236P520
R521FL	CHIP THICK	4.7K-J,1/10W	C200047260200
R521FR	CHIP THICK	4.7K-J,1/10W	C200047260200
R522FL	CHIP THICK	390-J,1/10W	C200039160200
R522FR	CHIP THICK	390-J,1/10W	C200039160200
R523C	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
R523ER	CHIP THICK	470-J,1/10W	C200047160200
R523FL	CHIP THICK	470-J,1/10W	C200047160200
R523FL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
R523FR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
R523SL	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
R523SR	CERAMIC CHIP T.C	COG100PF-J/50V	D010101167200
R524C	CHIP THICK	1K-J,1/10W	C200010260200
R524FL	CHIP THICK	1K-J,1/10W	C200010260200
R524FR	CHIP THICK	1K-J,1/10W	C200010260200
R524SL	CHIP THICK	1K-J,1/10W	C200010260200
R524SR	CHIP THICK	1K-J,1/10W	C200010260200
R524W	CHIP THICK	1K-J,1/10W	C200010260200
R525C	CHIP THICK	100K-J,1/10W	C200010460200
R525FL	CHIP THICK	100K-J,1/10W	C200010460200
R525FR	CHIP THICK	100K-J,1/10W	C200010460200
R525SL	CHIP THICK	100K-J,1/10W	C200010460200
R525SR	CHIP THICK	100K-J,1/10W	C200010460200
R525W	CHIP THICK	47K-J,1/10W	C200047360200
R526C	CHIP THICK	4.7K-J,1/10W	C200047260200
R526FL	CHIP THICK	7.5K-J,1/10W	C200075260200
R526FR	CHIP THICK	7.5K-J,1/10W	C200075260200
R526SL	CHIP THICK	4.7K-J,1/10W	C200047260200
R526SR	CHIP THICK	4.7K-J,1/10W	C200047260200
R527C	CHIP THICK	4.7K-J,1/10W	C200047260200
R527FL	CHIP THICK	2.2K-J,1/10W	C200022260200
R527FR	CHIP THICK	2.2K-J,1/10W	C200022260200
R527SL	CHIP THICK	4.7K-J,1/10W	C200047260200
R527SR	CHIP THICK	4.7K-J,1/10W	C200047260200
R527W	CHIP THICK	1K-J,1/10W	C200010260200
R528C	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R528FL	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R528FR	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R528SL	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R528SR	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R528W	CARBON FILM	1K-J,1/5W-AX	C00001026P520
R529C	CHIP THICK	1K-J,1/10W	C200010260200
R529FL	CHIP THICK	1K-J,1/10W	C200010260200
R529FR	CHIP THICK	1K-J,1/10W	C200010260200
R529SL	CHIP THICK	1K-J,1/10W	C200010260200
R529SR	CHIP THICK	1K-J,1/10W	C200010260200
R529SW	CHIP THICK	1K-J,1/10W	C200010260200

NO	DESCRIPTION		PARTS NO
R530C	CARBON FILM	7.5K-J,1/5W-AX	C00007526P520
R530FL	CARBON FILM	7.5K-J,1/5W-AX	C00007526P520
R530SL	CARBON FILM	7.5K-J,1/5W-AX	C00007526P520
R530W	CARBON FILM	7.5K-J,1/5W-AX	C00007526P520
R531C	CHIP THICK	100K-J,1/10W	C200010460200
R531FL	CHIP THICK	100K-J,1/10W	C200010460200
R531FR	CHIP THICK	100K-J,1/10W	C200010460200
R531SL	CHIP THICK	100K-J,1/10W	C200010460200
R531SR	CHIP THICK	100K-J,1/10W	C200010460200
R531W	CHIP THICK	5.6K-J,1/10W	C200056260200
R532FL	CHIP THICK	100K-J,1/10W	C200010460200
R532FR	CHIP THICK	100K-J,1/10W	C200010460200
R532W	CHIP THICK	100K-J,1/10W	C200010460200
R601	CHIP THICK	47K-J,1/10W	C200047360200
R602	CHIP THICK	47K-J,1/10W	C200047360200
R603	CHIP THICK	47K-J,1/10W	C200047360200
R604	CHIP THICK	47K-J,1/10W	C200047360200
R605	CHIP THICK	47K-J,1/10W	C200047360200
	CLAMP WIRE		4330000120000
	CN,WIRE 1P		L045084006040
	CHIP THICK	0-J,1/10W	C200000060200
	TER,RCA 6PIN		G603060046040
	CN,WIRE 10P		L000221100010

PCB6	ASSEMBLY P.C.BOARD AC3		7025HK9902025
BEAD802	BEAD COIL, BK2125HS121-T		7611010000000
BEAD803	BEAD COIL, BK2125HS121-T		7611010000000
C703	CERAMIC CHIP T.C	COG82PF-J/50V	D010820167200
C704	CERAMIC CHIP T.C	COG82PF-J/50V	D010820167200
C801L	ELECT GE 85C	3.3UF-M/50V	D0403R3087100
C801R	ELECT GE 85C	3.3UF-M/50V	D0403R3087100
C802L	CERAMIC CHIP T.C	COG470PF-J/50V	D010471167200
C802R	CERAMIC CHIP T.C	COG470PF-J/50V	D010471167200
C803L	CERAMIC CHIP T.C	COG75PF-J/50V	D010750167210
C803R	CERAMIC CHIP T.C	COG75PF-J/50V	D010750167210
C804L	ELECT GE 85C	10UF-M/35V	D0401000851 00
C804R	ELECT GE 85C	10UF-M/35V	D0401000851 00
C805	ELECT GE 85C	100UF-M/16V	D0401010831 00
C806	ELECT GE 85C	100UF-M/16V	D0401010831 00
C807	CERAMIC CHIP T.C	COG22PF-J/50V	D010220167200
C808	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C809	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C810	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C811	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C812	CERAMIC CHIP T.C	COG22PF-J/50V	D010220167200
C813	CERAMIC CHIP HIK	X7R0.01UF-K/50V	D011103177210
C814	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C815	CERAMIC CHIP T.C	COG22PF-J/50V	D010220167200
C816	ELECT GE 85C	1UF-M/50V	D040010087050

NO	DESCRIPTION		PARTS NO
C817	CERAMIC CHIP HIK	X7R0.015UF-K/50V	D011153177210
C818	CERAMIC CHIP HIK	X7R1500PF-K/50V	D011152177210
C819	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C820	ELECT GE 85C	220UF-M/10V	D040221082050
C823	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C824	CERAMIC CHIP T.C	COG22PF-J/50V	D010220167200
C825	CERAMIC CHIP T.C	COG22PF-J/50V	D010220167200
C826	CERAMIC CHIP T.C	COG22PF-J/50V	D010220167200
C827	ELECT GE 85C	220UF-M/10V	D040221082050
C828	ELECT GE 85C	1UF-M/50V	D040010087050
C830	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C831	ELECT GE 85C	47UF-M/16V	D040470083100
C832	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C833	CERAMIC CHIP T.C	COG27PF-J/50V	D010270167200
C834	CERAMIC CHIP T.C	COG27PF-J/50V	D010270167200
C835	ELECT GE 85C	100UF-M/16V	D040101083100
C836	CERAMIC CHIP T.C	COG470PF-J/50V	D010471167200
C837	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C839	ELECT GE 85C	470UF-M/10V	D040471082060
C840C	ELECT GE 85C	10UF-M/35V	D040100085100
C840L	ELECT GE 85C	10UF-M/35V	D040100085100
C840R	ELECT GE 85C	10UF-M/35V	D040100085100
C840SL	ELECT GE 85C	10UF-M/35V	D040100085100
C840SR	ELECT GE 85C	10UF-M/35V	D040100085100
C840SW	ELECT GE 85C	10UF-M/35V	D040100085100
C841C	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C841L	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C841R	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C841SL	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C841SR	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C841SW	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C842C	CERAMIC CHIP HIK	X7R1500PF-K/50V	D011152177210
C842L	CERAMIC CHIP HIK	X7R1500PF-K/50V	D011152177210
C842R	CERAMIC CHIP HIK	X7R1500PF-K/50V	D011152177210
C842SL	CERAMIC CHIP HIK	X7R1500PF-K/50V	D011152177210
C842SR	CERAMIC CHIP HIK	X7R1500PF-K/50V	D011152177210
C842SW	FILM POLYESTER	BOX-0.082UF-J/63V	D020823068050
C843C	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C843L	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C843R	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C843SL	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C843SR	CERAMIC CHIP HIK	X7R1000PF-K/50V	D011102777200
C843SW	FILM POLYESTER	BOX-0.012UF-J/63V	D020123068050
C844C	ELECT GE 85C	10UF-M/35V	D040100085100
C844L	ELECT GE 85C	10UF-M/35V	D040100085100
C844R	ELECT GE 85C	10UF-M/35V	D040100085100
C844SL	ELECT GE 85C	10UF-M/35V	D040100085100
C844SR	ELECT GE 85C	10UF-M/35V	D040100085100
C844SW	ELECT GE 85C	4.7UF-M/50V	D0404R7087100

NO	DESCRIPTION		PARTS NO
C845C	CERAMIC CHIP HIK	X7R3300PF-K/50V	D011332177210
C845L	CERAMIC CHIP HIK	X7R3300PF-K/50V	D011332177210
C845R	CERAMIC CHIP HIK	X7R3300PF-K/50V	D011332177210
C845SL	CERAMIC CHIP HIK	X7R3300PF-K/50V	D011332177210
C845SR	CERAMIC CHIP HIK	X7R3300PF-K/50V	D011332177210
C845SW	FILM POLYESTER	BOX-0.47UF-J/63V	D020474068050
C846	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C847	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C848	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C849	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C850	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C851	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C854	CERAMIC CHIP T.C	COG22PF-J/50V	D010220167200
C855	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C856	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C858	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C859	CERAMIC CHIP T.C	COG22PF-J/50V	D010220167200
C861	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C862	CERAMIC CHIP HIK	X7R0.01UF-K/50V	D011103177210
C863	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C864	ELECT GE 85C	100UF-M/16V	D040101083100
C865	CERAMIC CHIP HIK	Y5V0.1UF-Z/50V	D011104597200
C866	ELECT GE 85C	470UF-M/10V	D040471082060
C867	CERAMIC HIK AXIAL	B100PF-K/50V	D005101177520
C868	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C869	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C880	ELECT GE 85C	4.7UF-M/50V	D0404R70871 00
C910	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
C999	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
CP801	CN.WAFER 2.0MM (11P)		L1013523711 10
CP802	CN.WAFER 2.0MM (16P)		L1013523716 10
D801	KDS193ST1, SWITCHING		K005019300020
D802	KDS193ST1, SWITCHING		K005019300020
D803	KDS193ST1, SWITCHING		K005019300020
D804	KDS193ST1, SWITCHING		K005019300020
D805	KDS193ST1, SWITCHING		K005019300020
D806	KDS193ST1, SWITCHING		K005019300020
D807	KDS193ST1, SWITCHING		K005019300020
D808	KDS193ST1, SWITCHING		K005019300020
D880	1SS133T, SWITCHING		K000013300520
IC801	NJM2068DD, OP		J121206800000
IC802	74HCU04AD, INVERTER		J040740400200
IC803	YSS912, DOLBY		J081912000110
IC804	CS4226KQ, AD/DA CONV		J080422600110
IC805	NJM2068DD, OP		J121206800000
IC806	NJM2068DD, OP		J121206800000
IC807	NJM2068DD, OP		J121206800000
IC808	TK11233AM, REG		J126112330200
IC809	74HCU04AD, INVERTER		J040740400200

NO	DESCRIPTION		PARTS NO
JACK802	OPTICAL MODULE, GP1F32R		E100132000020
L801	INDUCTOR COIL, 10uH		D330100700520
L802	INDUCTOR COIL, 10uH		D330100700520
R801L	CHIP THICK	470-J,1/10W	C200047160200
R801R	CHIP THICK	470-J,1/10W	C200047160200
R802L	CHIP THICK	47K-J,1/10W	C200047360200
R802R	CHIP THICK	47K-J,1/10W	C200047360200
R803L	CHIP THICK	1.5K-J,1/10W	C200015260200
R803R	CHIP THICK	1.5K-J,1/10W	C200015260200
R804L	CHIP THICK	1.8K-J,1/10W	C200018260200
R804R	CHIP THICK	1.8K-J,1/10W	C200018260200
R805	CHIP THICK	22-J,1/10W	C200022060200
R806	CHIP THICK	22-J,1/10W	C200022060200
R807	CHIP THICK	82-J,1/10W	C200082060200
R809	CHIP THICK	4.7K-J,1/10W	C200047260200
R811	CHIP THICK	18K-J,1/10W	C200018360200
R812	CHIP THICK	100K-J,1/10W	C200010460200
R813	CHIP THICK	1K-J,1/10W	C200010260200
R814	CHIP THICK	470-J,1/10W	C200047160200
R815	CHIP THICK	100K-J,1/10W	C200010460200
R816	CHIP THICK	100-J,1/10W	C200010160200
R817	CHIP THICK	10K-J,1/10W	C200010360200
R818	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R819	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R820	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R821	BEAD COIL, 3580		7610010030000
R823	CHIP THICK	47K-J,1/10W	C200047360200
R824	CHIP THICK	43K-J,1/10W	C200043360200
R825	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R826	CHIP THICK	100K-J,1/10W	C200010460200
R827	CARBON FILM	2.2-J,1/5W-AX	C0002R206P520
R828	CHIP THICK	100-J,1/10W	C200010160200
R829	CHIP THICK	100-J,1/10W	C200010160200
R830	CHIP THICK	100-J,1/10W	C200010160200
R831	CHIP THICK	1M-J,1/10W	C200010560200
R832	CHIP THICK	10K-J,1/10W	C200010360200
R833	CHIP THICK	10K-J,1/10W	C200010360200
R834	CHIP THICK	10K-J,1/10W	C200010360200
R835	CHIP THICK	470-J,1/10W	C200047160200
R836	CHIP THICK	1M-J,1/10W	C200010560200
R837	CHIP THICK	10K-J,1/10W	C200010360200
R838	CHIP THICK	33-J,1/10W	C200033060200
R839	CHIP THICK	33-J,1/10W	C200033060200
R840	CHIP THICK	33-J,1/10W	C200033060200
R841	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R842	CARBON FILM	10K-J,1/5W-AX	C00001036P520
R843	CHIP THICK	100K-J,1/10W	C200010460200
R844	CHIP THICK	33-J,1/10W	C200033060200
R845-R854	CARBON FILM	10K-J,1/5W-AX	C00001036P520

NO		DESCRIPTION	PARTS NO
R855C	CHIP THICK	47K-J,1/10W	C200047360200
R855L	CHIP THICK	47K-J,1/10W	C200047360200
R855R	CHIP THICK	47K-J,1/10W	C200047360200
R855SL	CHIP THICK	47K-J,1/10W	C200047360200
R855SR	CHIP THICK	47K-J,1/10W	C200047360200
R855SW	CHIP THICK	47K-J,1/10W	C200047360200
R856C	CHIP THICK	1K-J,1/10W	C200010260200
R856L	CHIP THICK	1K-J,1/10W	C200010260200
R856R	CHIP THICK	1K-J,1/10W	C200010260200
R856SL	CHIP THICK	1K-J,1/10W	C200010260200
R856SR	CHIP THICK	1K-J,1/10W	C200010260200
R856SW	CHIP THICK	1K-J,1/10W	C200010260200
R857C	CHIP THICK	3.3K-J,1/10W	C200033260200
R857L	CHIP THICK	3.3K-J,1/10W	C200033260200
R857R	CHIP THICK	3.3K-J,1/10W	C200033260200
R857SL	CHIP THICK	3.3K-J,1/10W	C200033260200
R857SR	CHIP THICK	3.3K-J,1/10W	C200033260200
R857SW	CHIP THICK	15K-J,1/10W	C200015360200
R858C	CHIP THICK	3.3K-J,1/10W	C200033260200
R858L	CHIP THICK	3.3K-J,1/10W	C200033260200
R858R	CHIP THICK	3.3K-J,1/10W	C200033260200
R858SL	CHIP THICK	3.3K-J,1/10W	C200033260200
R858SR	CHIP THICK	3.3K-J,1/10W	C200033260200
R858SW	CHIP THICK	15K-J,1/10W	C200015360200
R859C	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R859L	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R859R	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R859SL	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R859SR	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R859SW	CARBON FILM	1.2K-J,1/5W-AX	C00001226P520
R860C	CHIP THICK	2.0K-J,1/10W	C200020260200
R860L	CHIP THICK	2.0K-J,1/10W	C200020260200
R860R	CHIP THICK	2.0K-J,1/10W	C200020260200
R860SL	CHIP THICK	2.0K-J,1/10W	C200020260200
R860SR	CHIP THICK	2.0K-J,1/10W	C200020260200
R860SW	CHIP THICK	9.1K-J,1/10W	C200091260200
R863C	CHIP THICK	2.2K-J,1/10W	C200022260200
R863L	CHIP THICK	2.2K-J,1/10W	C200022260200
R863R	CHIP THICK	2.2K-J,1/10W	C200022260200
R863SL	CHIP THICK	2.2K-J,1/10W	C200022260200
R863SR	CHIP THICK	2.2K-J,1/10W	C200022260200
R863SW	CHIP THICK	390-J,1/10W	C200039160200
R864C	CHIP THICK	47K-J,1/10W	C200047360200
R864L	CHIP THICK	47K-J,1/10W	C200047360200
R864R	CHIP THICK	47K-J,1/10W	C200047360200
R864SL	CHIP THICK	47K-J,1/10W	C200047360200
R864SR	CHIP THICK	47K-J,1/10W	C200047360200
R864SW	CHIP THICK	47K-J,1/10W	C200047360200
R865	CARBON FILM	3.3-J,1/5W-AX	C0003R306P520

NO	DESCRIPTION		PARTS NO
R866	CHIP THICK	82-J,1/10W	C200082060200
R868	CHIP THICK	4.7K-J,1/10W	C200047260200
R869	CHIP THICK	18K-J,1/10W	C200018360200
R870	CHIP THICK	100K-J,1/10W	C200010460200
R871	CHIP THICK	1K-J,1/10W	C200010260200
R872	CHIP THICK	470-J,1/10W	C200047160200
R873	CHIP THICK	1M-J,1/10W	C200010560200
R874	CHIP THICK	100K-J,1/10W	C200010460200
R875	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R876	CHIP THICK	0-J,1/10W	C200000060200
R880	CARBON FILM	47K-J,1/5W-AX	C00004736P520
R950	CARBON FILM	1K-J,1/5W-AX	C00001026P520
XTAL801	CRYSTAL, 12.288MHz		E80012R288020
	1SS133T, SWITCHING		K000013300520
	CN,WIRE 1P		L045084006040
	CARBON FILM	3.3K-J,1/5W-AX	C00003326P520
	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
	OPTICAL MODULE, GP1F32R		E100132000020
	TER,RCA 2PIN		G601200099040
PCB7	**ASSEMBLY P.C.BOARD SPEAKER**		**7025HK9902024**
C901C	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
C901SL	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
C901SR	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
C902CD	FILM POLYESTER	ST-0.0047UF-J/100V	D02047206C060
C902SRD	FILM POLYESTER	ST-0.0047UF-J/100V	D02047206C060
C903CD	CERAMIC HIK AXIAL	X0.0047UF-K/16V	D005472773530
C903LD	CERAMIC HIK AXIAL	X0.0047UF-K/16V	D005472773530
C903LD	FILM POLYESTER	ST-0.0047UF-J/100V	D02047206C060
C903RD	CERAMIC HIK AXIAL	X0.0047UF-K/16V	D005472773530
C903RD	FILM POLYESTER	ST-0.0047UF-J/100V	D02047206C060
C903SLD	CERAMIC HIK AXIAL	X0.0047UF-K/16V	D005472773530
C903SLD	FILM POLYESTER	ST-0.0047UF-J/100V	D02047206C060
C903SRD	CERAMIC HIK AXIAL	X0.0047UF-K/16V	D005472773530
C904C	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
C904SL	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
C904SR	FILM POLYESTER	RED-0.1UF-K/63V	D020104078060
CN901	CN.WAFER 2.5MM (11P)		L102526681110
J901-J923	CN,WIRE 1P		L045084006040
J926-J934	CN,WIRE 1P		L045084006040
JACK901	TER,BOARD SCREW 8P		G61408103600A
JACK902	TER,BOARD SCREW 2P		G611021078110
L901SL	INDUCTOR COIL, J9000031		D330900001320
L901SR	INDUCTOR COIL, J9000031		D330900001320
R901C	METAL FILM	10-J,2W-AX	C060010066520
R901SL	METAL FILM	10-J,2W-AX	C060010066520
R901SR	METAL FILM	10-J,2W-AX	C060010066520
R902SL	METAL FILM	RES MF 10 OHM 1W	C060010065520
R902SR	METAL FILM	RES MF 10 OHM 1W	C060010065520

NO	DESCRIPTION		PARTS NO
PCB8	**ASEMBLY P.C.BOARD TUNER**		**7028040957710**
	CARBON FILM	100-J,1/5W	C00001016P520
	CARBON FILM	1K-J,1/5W-AX	C00001026P520
	CARBON FILM	10K-J,1/5W-AX	C00001036P520
	CARBON FILM	100K-J,1/5W-AX	C00001046P520
	CARBON FILM	1.5K-J,1/5W-AX	C00001526P520
	CARBON FILM	180-J,1/5W-AX	C00001816P520
	CARBON FILM	1.8K-J,1/5W-AX	C00001826P520
	CARBON FILM	22-J,1/5W-AX	C00002206P520
	CARBON FILM	22K-J,1/5W-AX	C00002236P520
	CARBON FILM	220K-J,1/5W-AX	C00002246P520
	CARBON FILM	2.2M-J,1/5W-AX	C00002256P520
	CARBON FILM	270-J,1/5W-AX	C00002716P520
	CARBON FILM	2.7K-J,1/5W-AX	C00002726P520
	CARBON FILM	270K-J,1/5W-AX	C00002746P520
	CARBON FILM	330-J,1/5W-AX	C00003316P520
	CARBON FILM	3.3K-J,1/5W-AX	C00003326P520
	CARBON FILM	39K-J,1/5W-AX	C00003936P520
	CARBON FILM	470-J,1/5W-AX	C00004716P520
	CARBON FILM	4.7K-J,1/5W-AX	C00004726P520
	CARBON FILM	47K-J,1/5W-AX	C00004736P520
	CARBON FILM	560-J,1/5W-AX	C00005616P520
	CARBON FILM	5.6K-J,1/5W-AX	C00005626P520
	CARBON FILM	680-J,1/5W-AX	C00006816P520
	CARBON FILM	68K-J,1/5W-AX	C00006836P520
	SEMI VR, EVM-DJAA03B25		C541204115D00
	SEMI VR, EVM-DJAA03B53		C541502115D00
	SEMI VR, EVM-DJAA03B54		C541503115D00
	CERAMIC T.C DISC	SL10PF-D/50V	D000100017D60
	CERAMIC T.C DISC	CH15PF-J/50V	D000150167D70
	CERAMIC T.C DISC	CH18PF-J/50V	D000180167D60
	CERAMIC T.C DISC	SL82PF-J/50V	D000820067D50
	CERAMIC HIK DISC	CK100PF-J/50V	D004101067D60
	CERAMIC HIK DISC	SL220PF-J/50V	D004221067D60
	CERAMIC HIK DISC	F0.022UF-Z/50V	D004223597D50
	CERAMIC HIK DISC	SL27PF-J/50V	D004270067D60
	CERAMIC HIK DISC	SL330PF-J/50V	D004331067D60
	CERAMIC HIK DISC	F0.047UF-Z/50V	D004473597D50
	CERAMIC HIK AXIAL	Y0.01UF-M/16V	D005103773530
	CERAMIC HIK AXIAL	F0.1UF-Z/50V	D005104597530
	CERAMIC HIK AXIAL	F0.022UF-Z/25V	D005223594520
	CERAMIC HIK AXIAL	B270PF-K/50V	D005271277520
	CERAMIC HIK AXIAL	F0.047UF-Z/50V	D005473597520
	CERAMIC SEMI DISC	F0.1UF-Z/50V	D006104597D50
	FILM POLYESTER	ST-0.022UF-J/100V	D02022306CD60
	FILM POLYESTER	ST-0.0033UF-J/100V	D02033206CD60
	FILM POLYESTER	ST-0.039UF-J/100V	D02039306CD60
	FILM STYLOR	ST-470PF-J/50V	D022471067D50
	FILM STYLOR	ST-680PF-J/50V	D022681067D50

NO	DESCRIPTION		PARTS NO
	ELECT GE 85C	1UF-M/50V	D040010087050
	ELECT GE 85C	10UF-M/35V	D040100085100
	ELECT GE 85C	100UF-M/16V	D040101083100
	ELECT GE 85C	3.3UF-M/50V	D0403R3087100
	ELECT GE 85C	47UF-M/16V	D040470083100
	ELECT GE 85C	4.7UF-M/50V	D0404R7087100
	ELECT GE 85C	0.22UF-M/50V	D040R22087100
	CERAMIC FILTER, SFE10.7MS3GH		E430107000150
	CRYSTAL, 4.332MHz		E800433200060
	CRYSTAL, 7.2MHz		E800720000080
	2SC1740SR, NPN		J5021740S0010
	KTC1923Y (C3194Y), NPN		J5023194Y0050
	KRA107M, PNP		J601107M00050
	DTC323TS, NPN		J602323TS0050
	1SS133T, SWITCHING		K000013300520
	MTZJ5.1B, ZENER		K06005R144520
	VARACTOR, SVC321SPA-C		K080032100520
	CN,WIRE 1P		L045084006040
	TRIMMER, TZ03-T110FR		D110100901100
	ANTENNA COIL, M7ZN-K5643A		D304564300000
	INDUCTOR COIL, 20.8MH		D330208001120
	MW OSC, 7BR-K111027		D940111027000
	COIL AM, IFT P-7SB		D950010050000
	COIL DET(A), FM K5713FKG		D970010020000
	COIL DET(B), FM K5714X		D970010030000
	MPX FILTER, 253AGG-K5001		E401500100000
	CERAMIC FILTER, AHCFM2-450BL		E431450000120
	RESONATOR, CSB456F11		E830456000050
	FM TUNER, FTA4-460H		E900446000110
	TER,SC0210392N PUSH		G59004046000A
	TDA7330BD, RDS DEMODULAST		J020733000010
	LA1266, RF		J124126600010
	LA3401, RF		J124340100010
	LM7001JUM, RF		J124700100010
	CN,WIRE 1P		L046221010580
	CN,WIRE 1P		L046241006260
	CABLE,HOLDER 2.5MM		L112524191900

Printed by: Schaltungsdienst Lange, Berlin (GERMANY)